




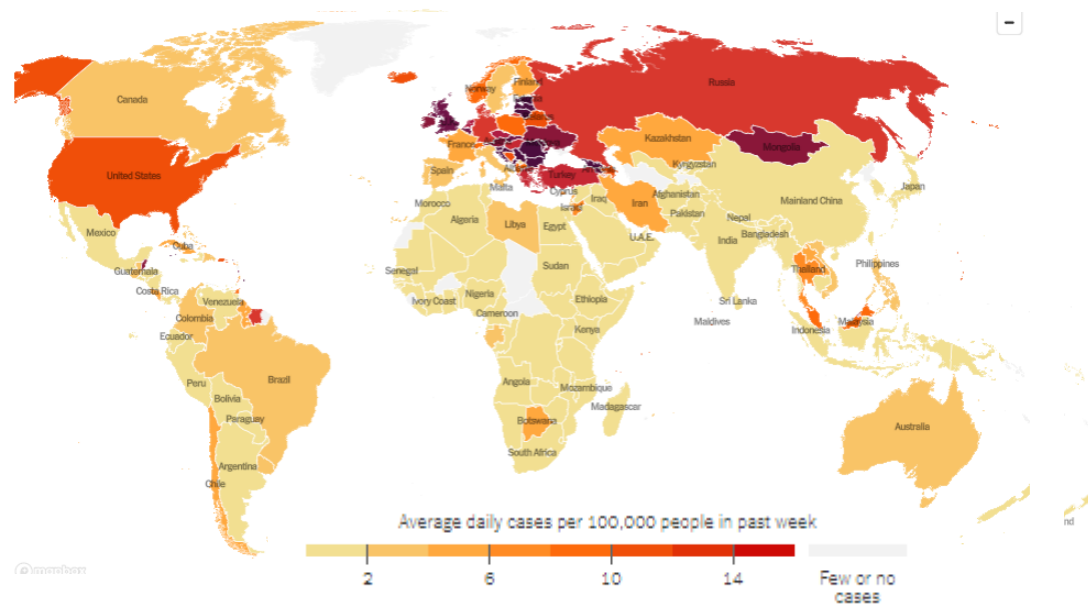


Representation

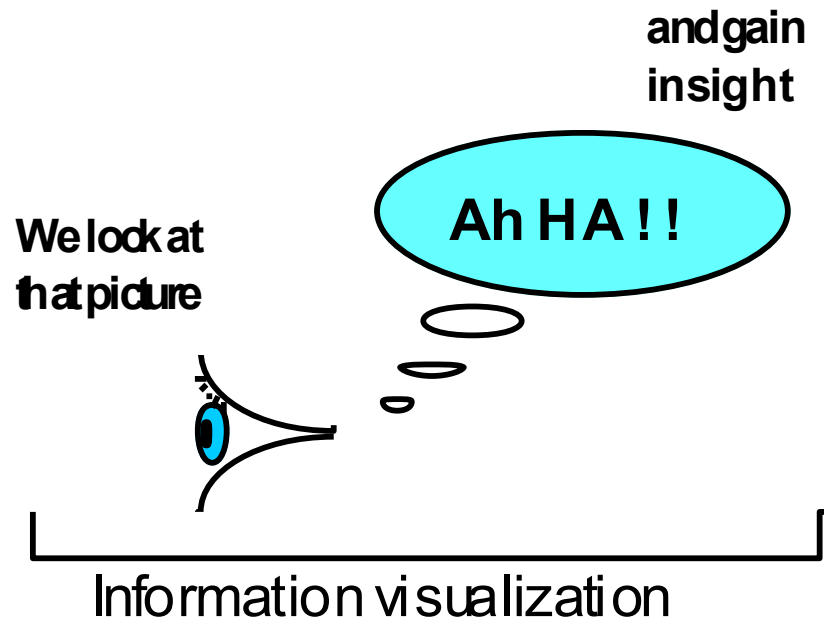

<https://www.nytimes.com/interactive/2021/world/covid-cases.html>

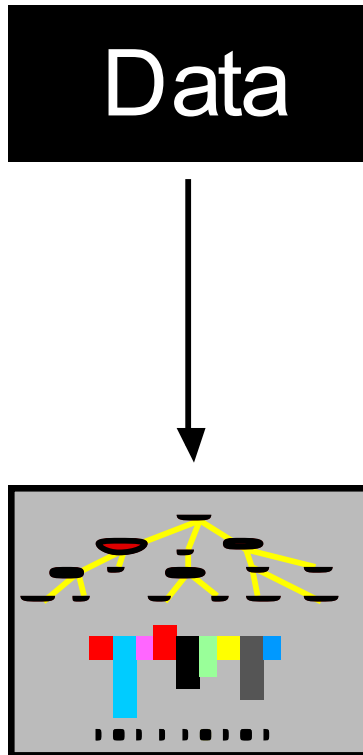

The process of information visualization: graphically encoded data is viewed in order to form a mental model of that data (Spence, 2007)

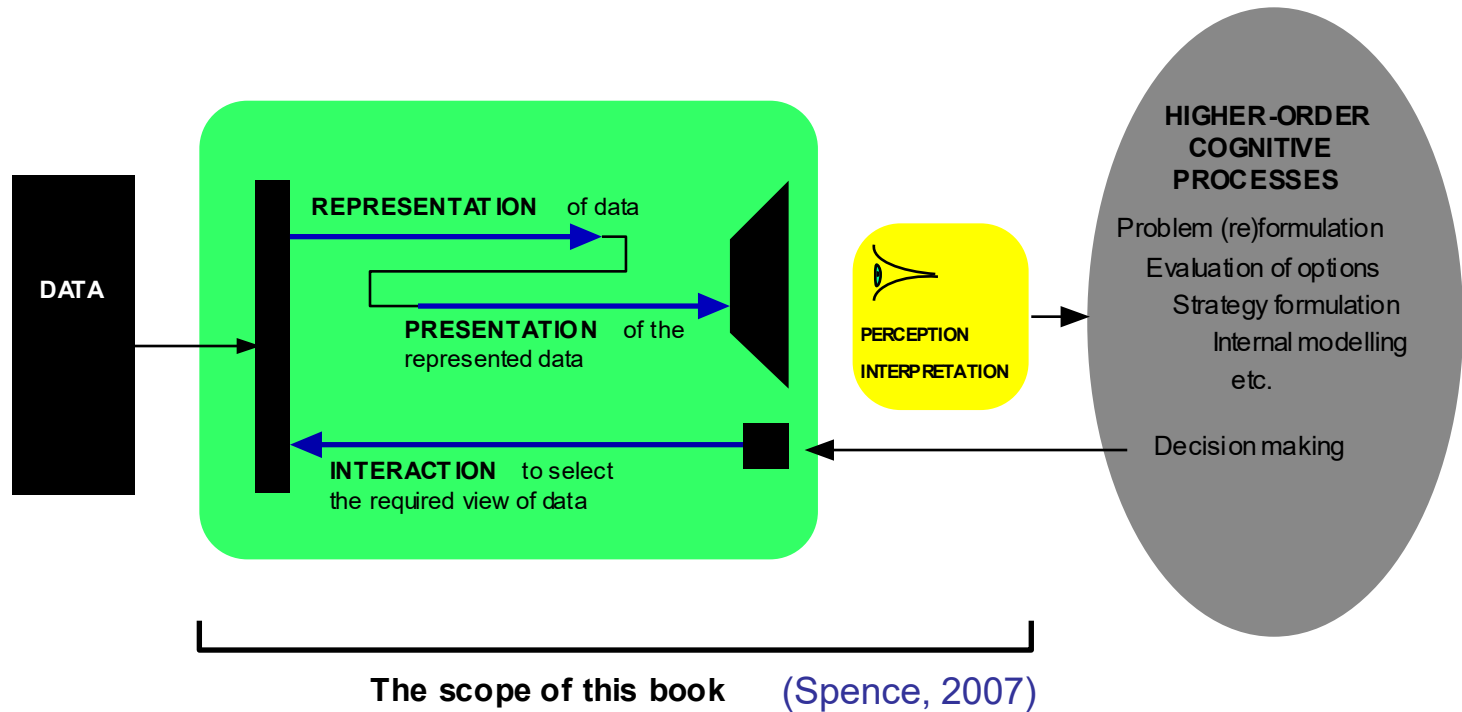


Interaction with data governed by high-order cognitive processes:

- Representation (how to code visually the data) ←
- Presentation (what/when/where to show on the screen)
- Interaction (how to let users explore the data)

Remember:

- The Human Visual system is the product of millions of years of evolution
- Although very flexible, it is tuned to data represented in specific ways
- If we understand how its mechanisms work we will be able to produce better results

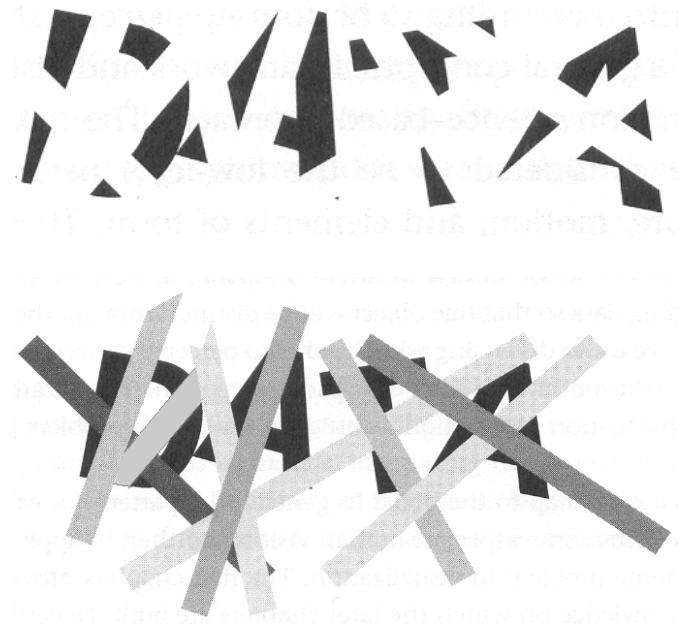

Pre-attentive attributes can help observers to see before though

Example: Count the number of 7s


6970425934749
3587282949546
4244396854634
2356658789376

69**7**0425934**7**49
358**7**282949546
4244396854634
2356658**7**893**7**6

https://www.youtube.com/watch?time_continue=121&v=AiD6etOB6qI

- Other visual attributes as **size**, **proximity** are also quickly processed by visual perception, **before the cognitive processes** come into play

Example: mapping numerical values to the length of bars:

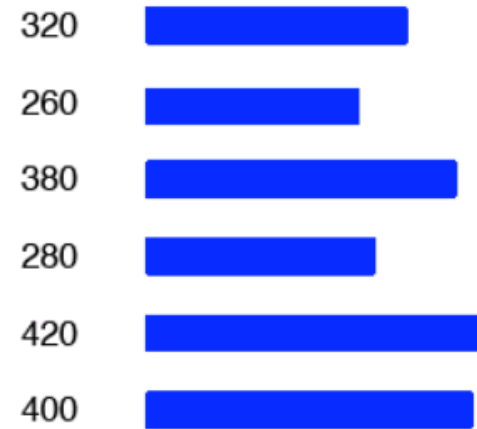

(Mazza, 2009)

Procedure to follow to create visual representations of abstract data


1. Define the problem and the users' questions
2. Examine the nature of the data to represent and pre-process the data
3. Determine the number of attributes
4. Choose the visual structures
5. Establish the type of interaction

test several ideas ...


nature of the problem  communicate
explore
confirm

nature of the data to represent  quantitative
ordinal
categorical

number of attributes  univariate
bivariate
trivariate
multivariate




Next: representation methods organized according the n. of attributes

data structures  linear
temporal
spatial or geographical
hierarchical
network



type of interaction  static
transformable
manipulable

Common Visualization Techniques for univariate, bivariate and trivariate data





Univariate data

- dot plot
- box plot
- bar chart
- histogram
- pie chart
- ...

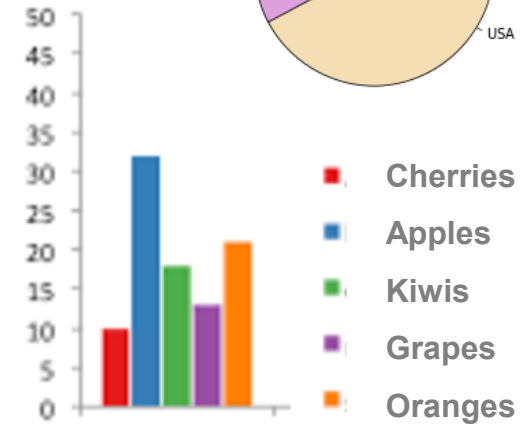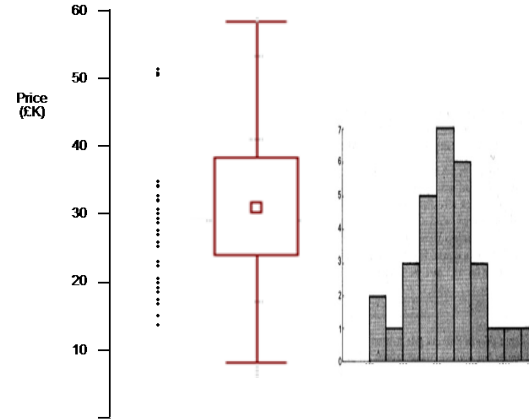



Bivariate data

- scatter plot
- line plot
- time series
- ...

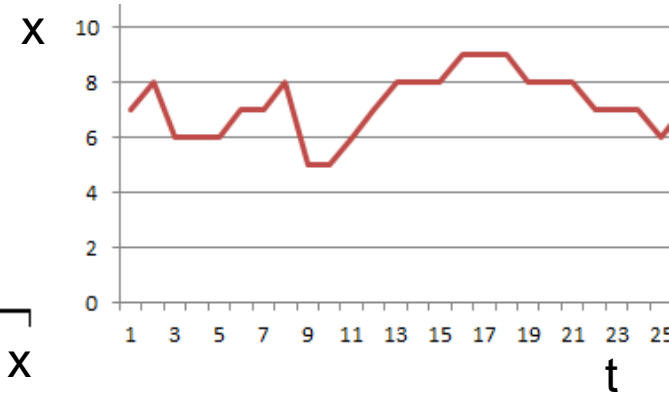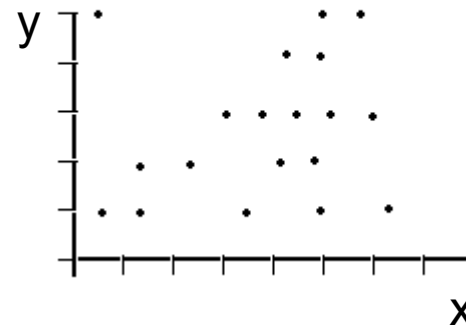

Trivariate data

- surface plot
- contour plot
- 3D representation
- bubble plot
- ...

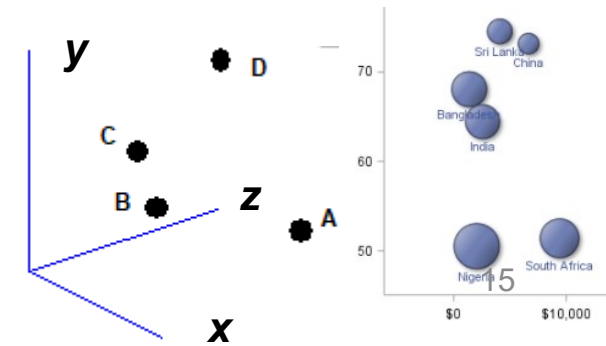


Representing univariate data

- A **single number** can be difficult to represent ensuring a user is made aware of it

Example: the altimeter
(Spence, 2007)



The original type of aircraft altimeter, with usability issues

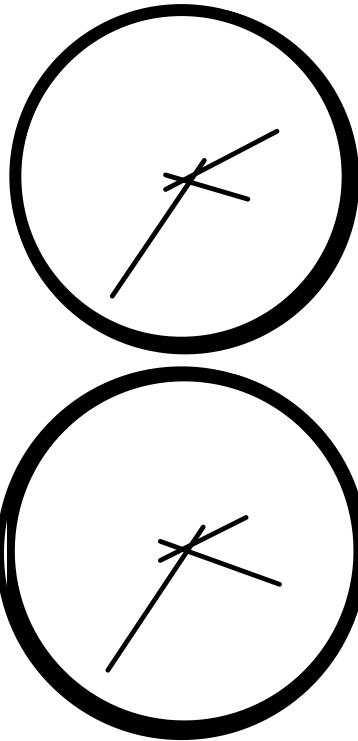

Two altimeter representations easily assumed to be the same due to change blindness



A more usable solution for altimeter display



Some more examples
on how humans see...

Example of change blindness
(Spence, 2007)

Example of change blindness
(Spence, 2007)

What is missing now?





Inattention blindness

https://www.youtube.com/watch?v=IGQmdoK_ZfY

Change blindness

http://www.youtube.com/watch?v=vBPG_OBgTWg&feature=related



Representing univariate data (cont.)

- A more common situation consists in representing a **set of values**
- Well established techniques exist
- But new ones can be invented!


Example:




Price for a number of cars:

- dots on a linear scale
 - box plot
- (that will answer many questions:
median value, outliers,...)

(Spence, 2007)

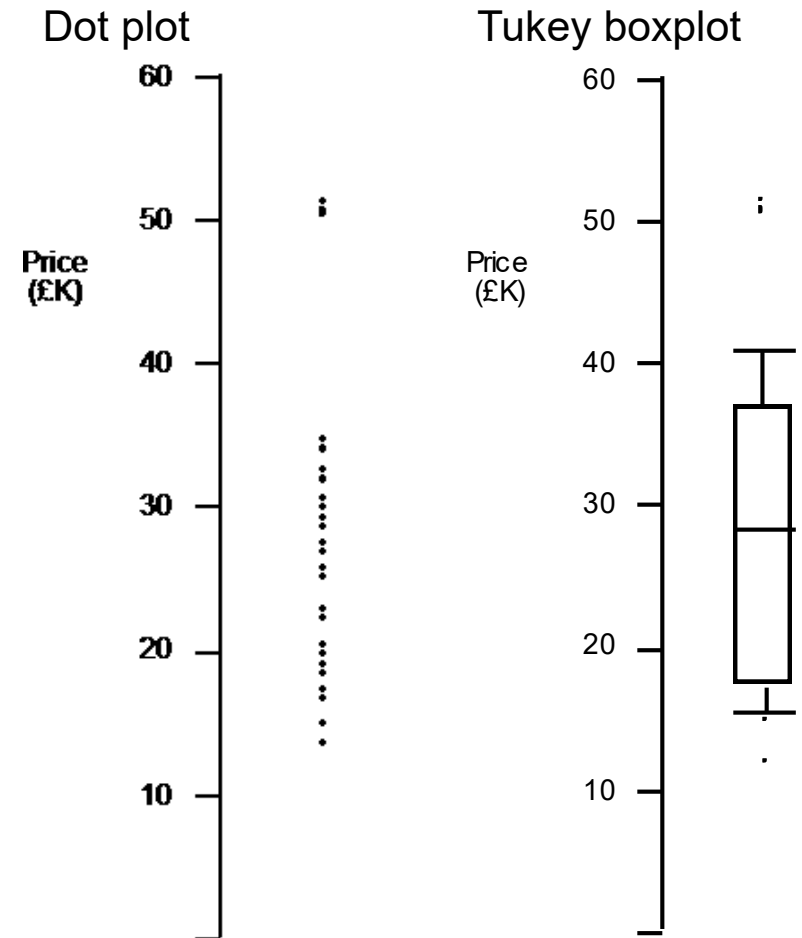

- much of the data is **aggregated**
- precise detail is often not needed
- We can represent **derived values**
- The **histogram** is a well known technique representing derived values

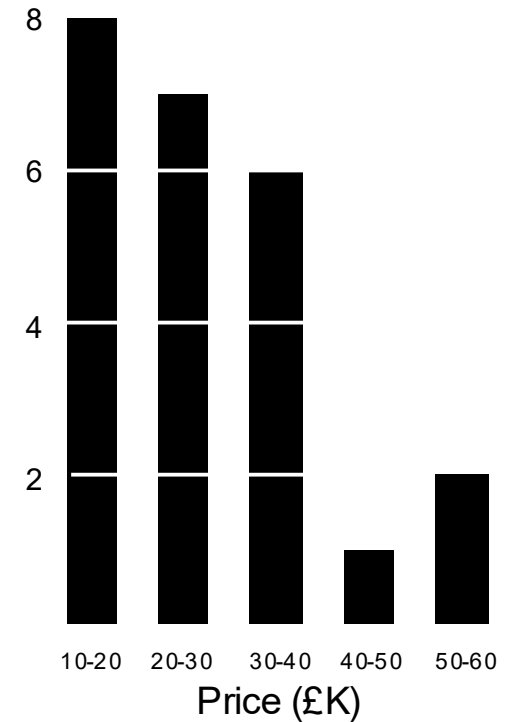

- Tipping over the bars of the histogram a **bargram** is obtained (Spence, 2007)



Missing characteristic: Empty bin


- Categorical or ordinal data can also be represented in bargrams





Simple (and common) representations of data

- Two common techniques not to be confused !

Histogram  represents a distribution of numerical data

Bar chart  represents the number of occurrences of a categorical/ordinal data




Both represent data by rectangular bars (vertical or horizontal) with length proportional to the values they represent

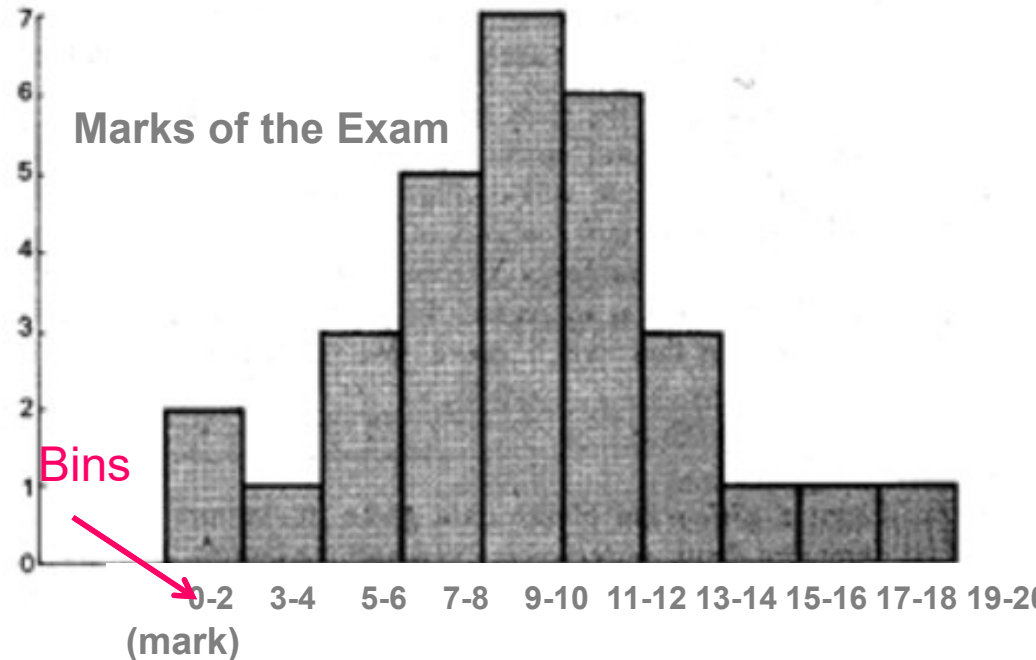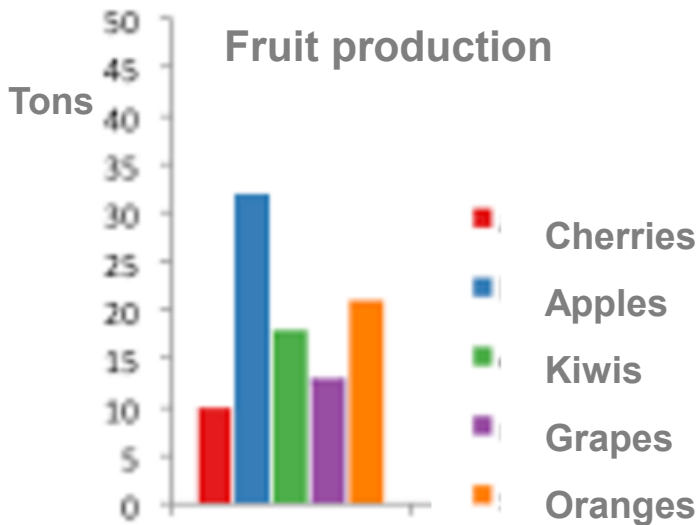



Histogram Quiz

Given the following plots with different bin widths, Match the description to the plot.

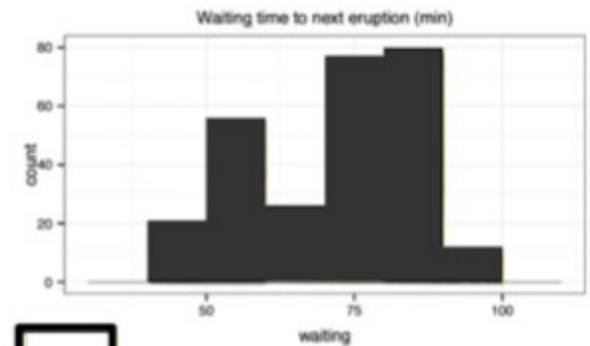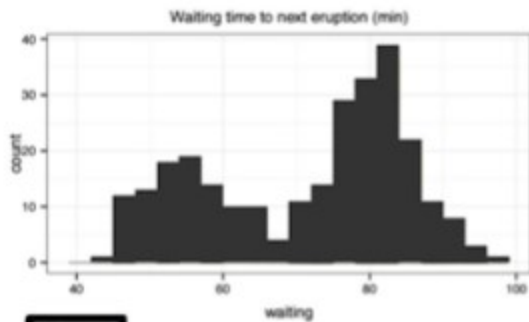

A: good bin width - shows important signal in data (two modes) but not too much noise.

B: bin width is too small
C: bin width is too big

Another simple (and too common) representation

- Pie Chart

Represents numerical proportion, **parts of an whole**

The arc length of each slice (its central angle and area), is proportional to the quantity it represents


Are much controversial:

many experts recommend avoiding them

<http://www.perceptualedge.com/articles/08-21-07.pdf>




It is difficult to compare different sections of a pie chart, or to compare data across different pie charts

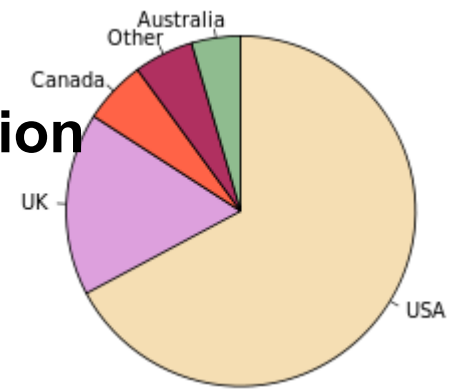

Native English speaking population

Variations of pie charts:

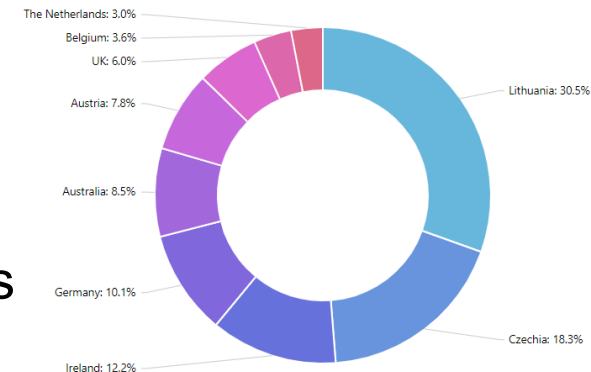

- Simple criteria to determine whether a pie chart is acceptable
- Consider it **only if**:
- **The parts make up a meaningful whole**
- **The parts are mutually exclusive**
- **There are <6 parts and slices have not very different sizes**

If the main purpose is to compare between the parts,
use a different chart!

<https://eagereyes.org/techniques/pie-charts>

Representing bivariate data

- The **scatterplot** is the conventional representation

Each observation is represented by a point on a two dimensional space


The axes are associated with these two attributes

This representation affords awareness of:

- general trends
- local trade-offs
- outliers




Correlation is not causation

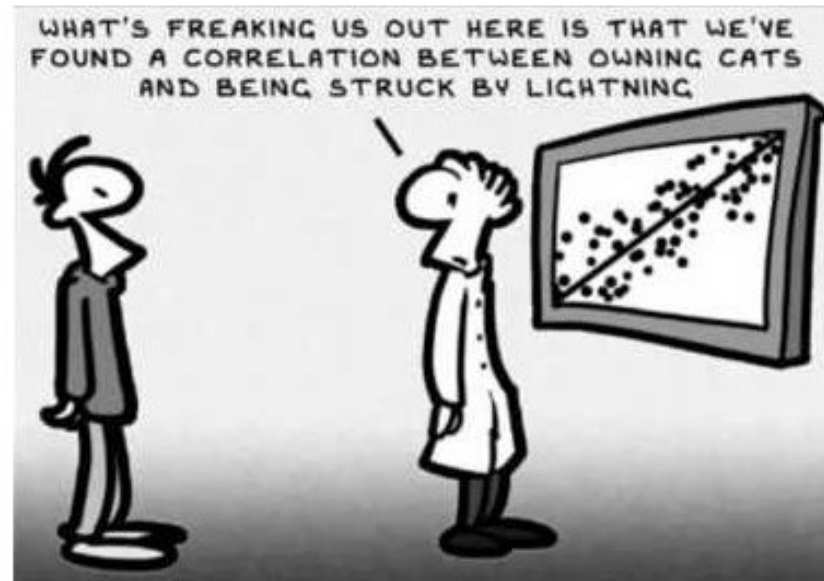

Representing bivariate data

The line chart


One of the oldest known and ubiquitous Visualizations

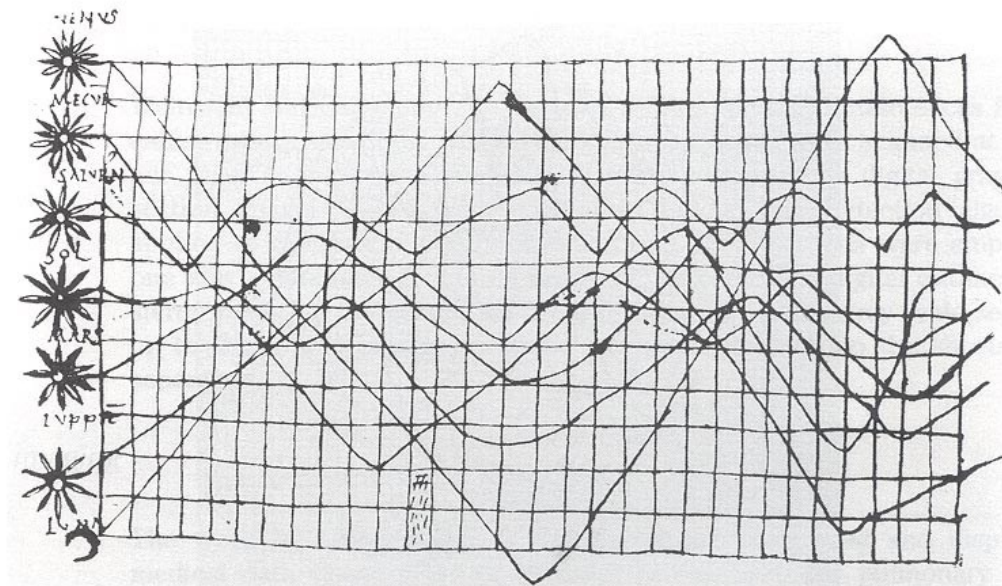

Inclination of orbits along the time - Xth century (Tufte, 1983)

- A **line chart** or **line plot** or **line graph** or **curve chart** displays information as a series of data points called 'markers' connected by straight line segments

- Basic type of chart common in many fields
- Often used to visualize a trend in data over intervals of time

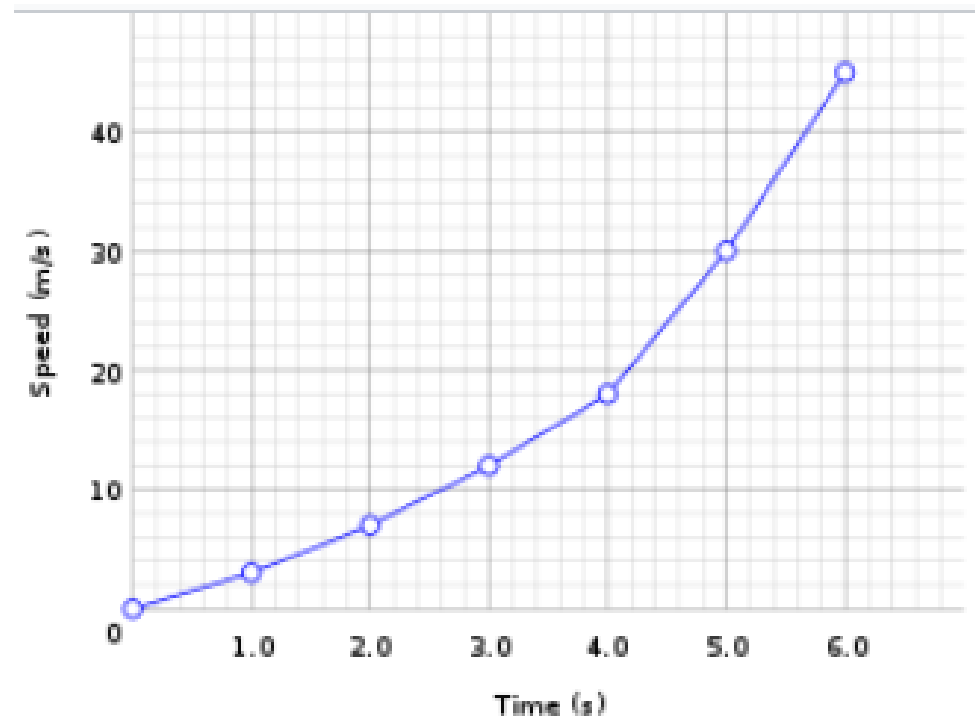


- If one attribute is more important than the other or must be examined first,
- it may be appropriate to employ logical or **semantic zoom**

Example:

Analyzing a list of cars:

- price is the first attribute to examine
- semantic zoom reveals data about a second attribute

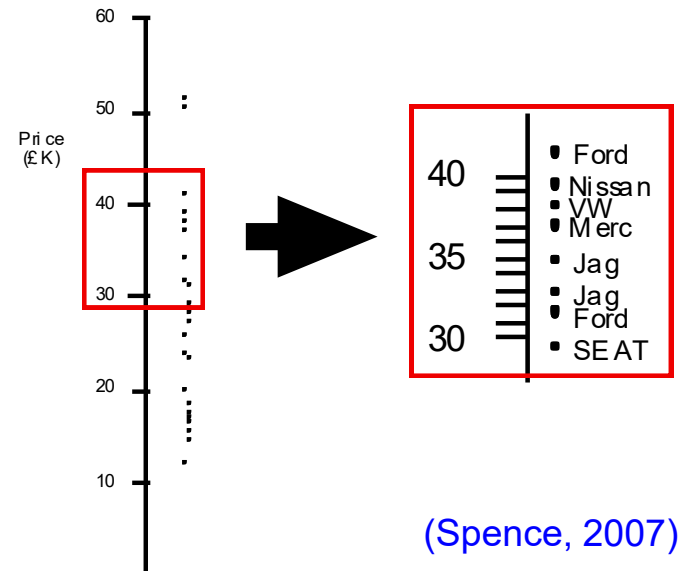


- This technique is quite general: it can encompass many attributes and many levels of progressive zoom

Representing Trivariate data

- Since we live in a 3D world, representing trivariate data as points in a 3D space and displaying a 2D view is natural



- However, these representations can be ambiguous
- This can be solved by interaction, allowing the user to reorient the representation

“for 3D to be useful, you’ ve got to be able to move it” (Spence, 2007)

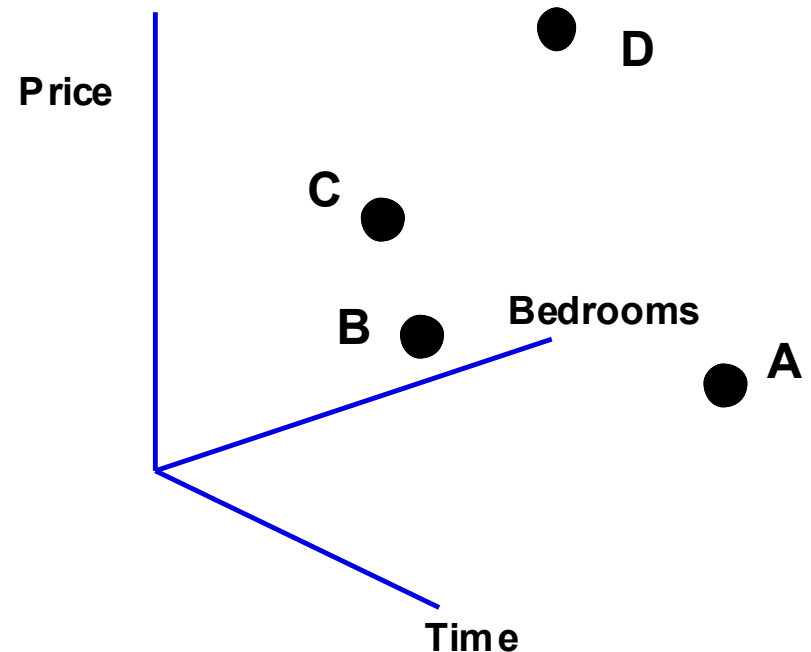

- Interaction (**brushing**) can help – objects identified in one view are highlighted in the other two planes
- change blindness must be taken into account and ensure that the user notices the highlight in the other two planes


(Spence, 2007)

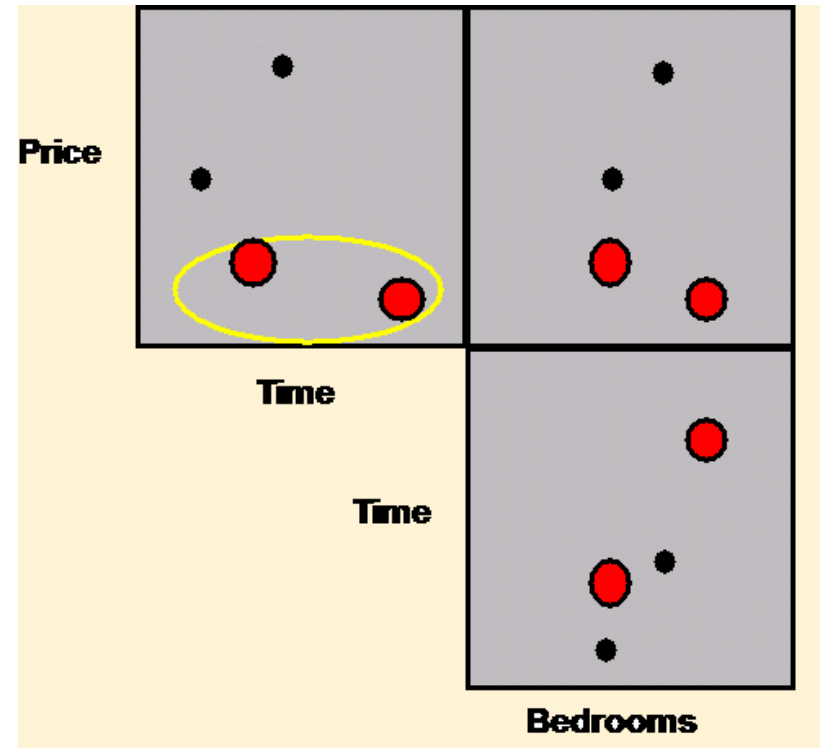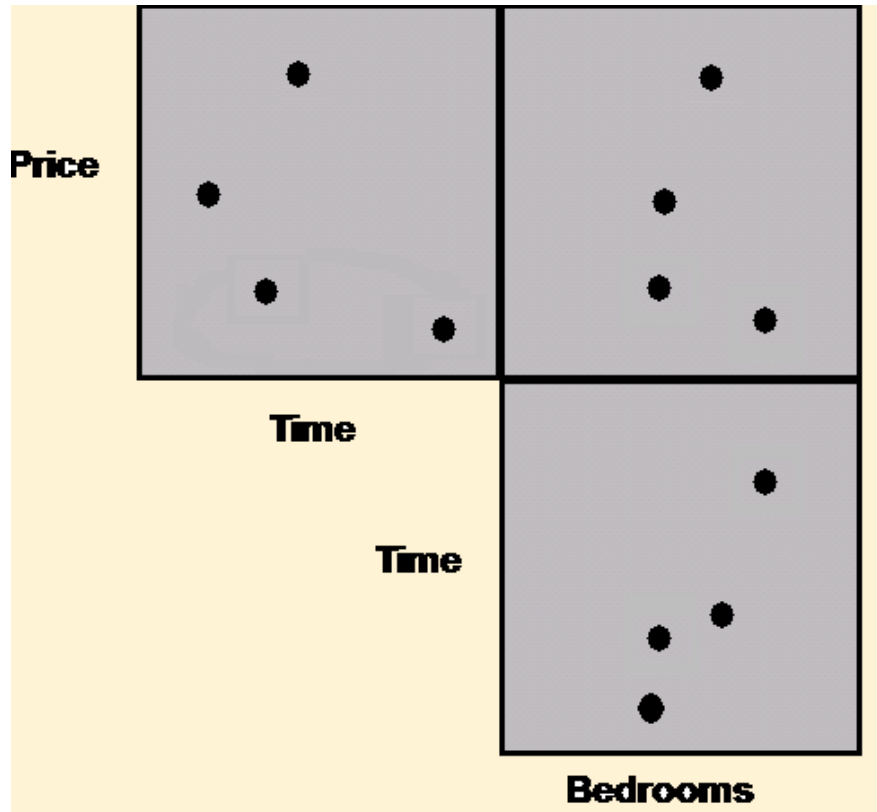


The highlighting of houses in one plane is brushed into the remaining planes.

- An alternative representation for trivariate (and hypervariate) data is a structure formed from the three possible 2D views of the data


Example: houses (price, number of bedrooms, time of journey to work)

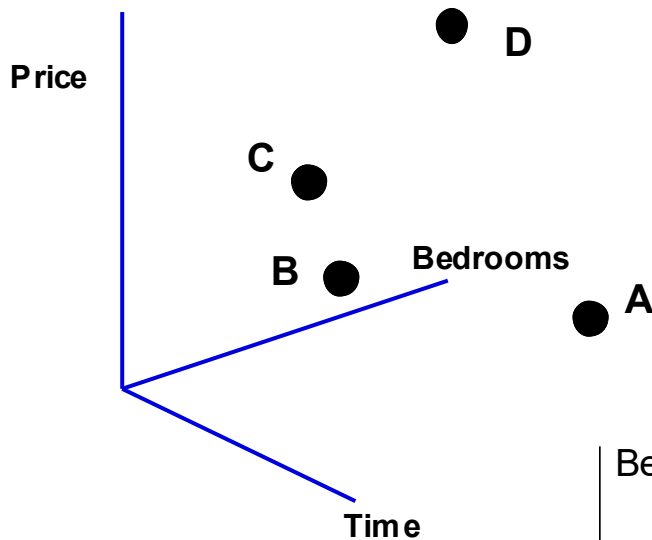

(Spence, 2007)

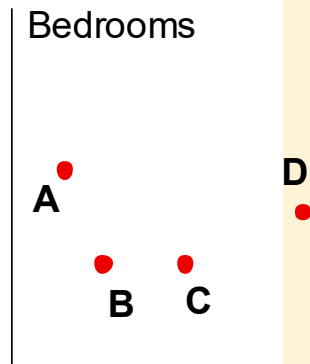


Scatterplot matrix

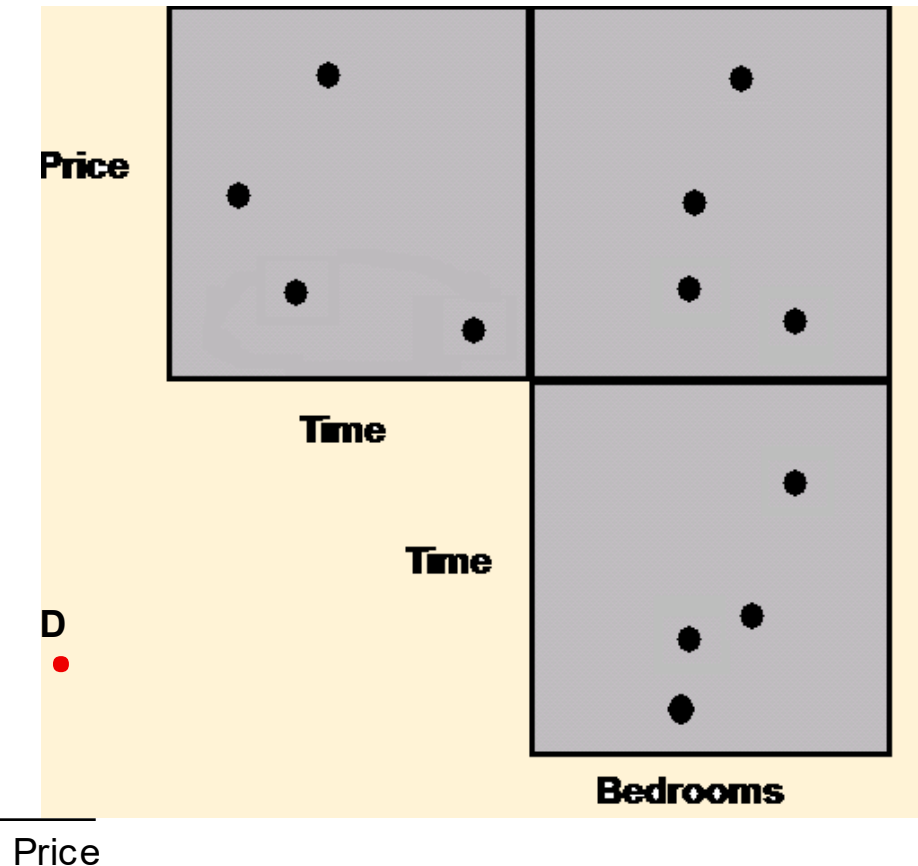


Other Simple (and common) representation of 3D data

- In a **bubble chart** data are represented as a disk that expresses two of the values through the disk's *xy* location and the third through its size (radius or area?)
- Mapping the variable to size must be done carefully. The interpretation of size may be ambiguous

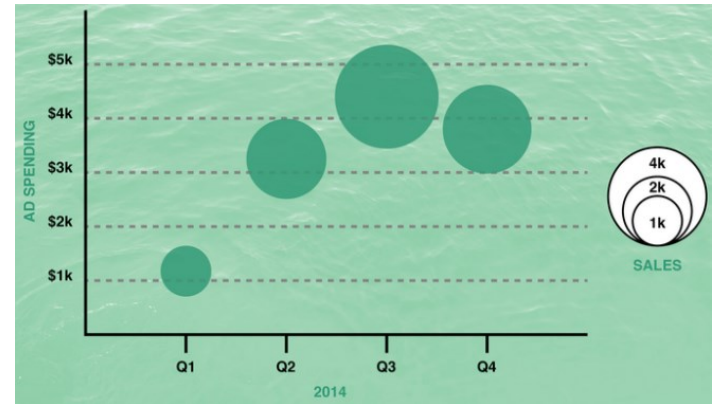


- Representing one more dimension through color

<https://visage.co/data-visualization-101-bubble-charts/>

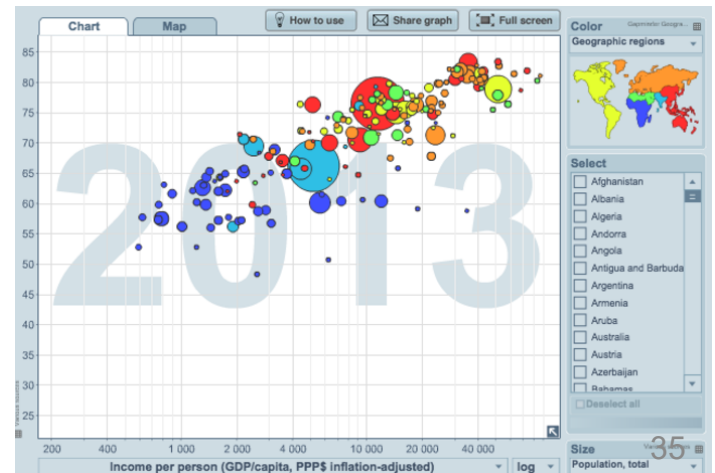



Simple representations of a function (field) of two variables

- Contour plots
- **contour line** (also **isoline**, **isopleth**, or **equipotential curve**) of a function of two variables is a curve along which the function has a constant value, so that the curve joins points of equal value.
- Typical in meteorological charts (isobars and isothermal curves)
- and maps (to represent altitude or depth)

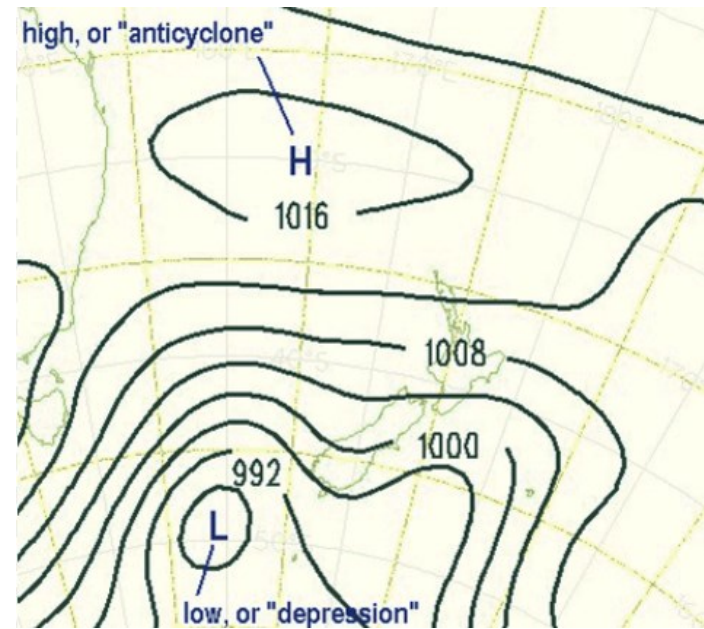


- Surface plots
- May be combined with color

(preferably in a redundant way and carefully selecting the scale)

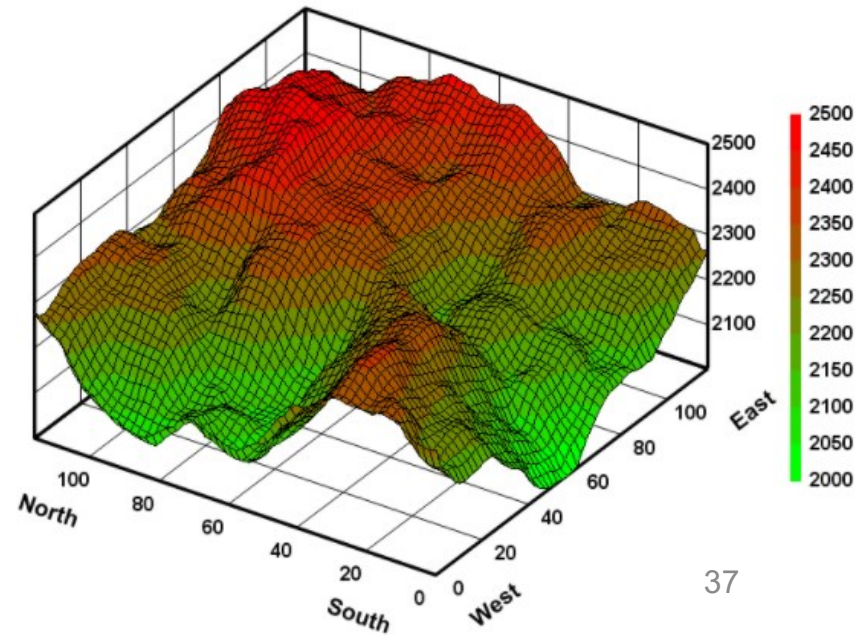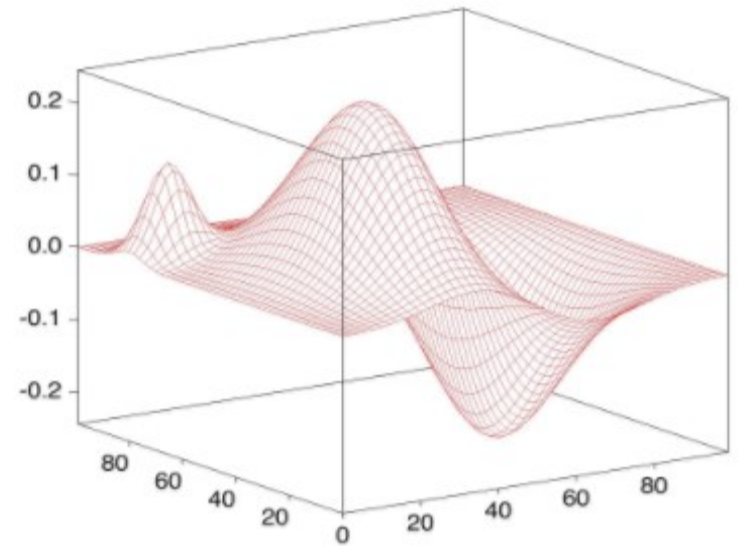

A special category of trivariate data: Maps (latitude and longitude + a value)

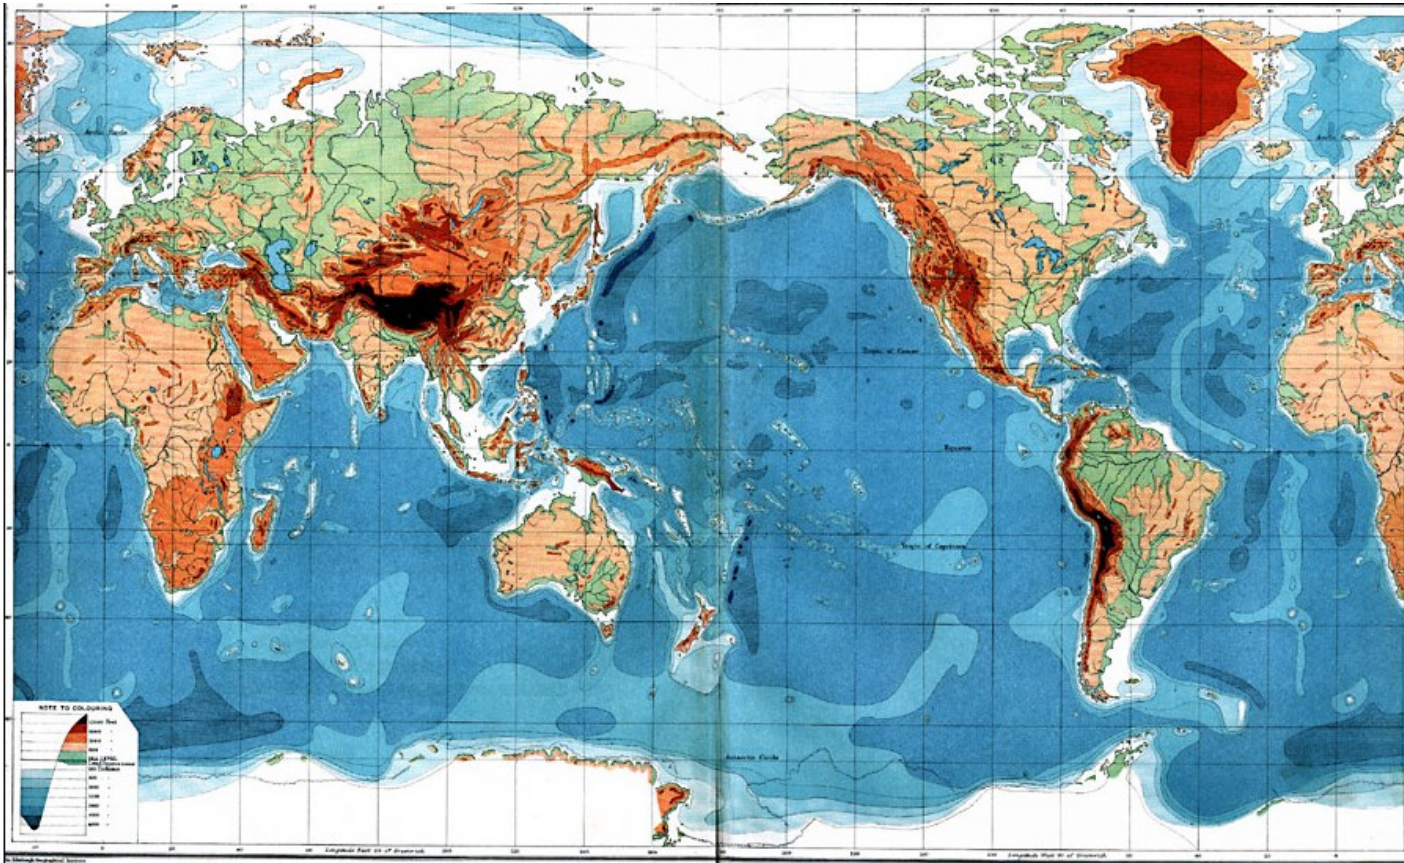


1915 – Orographic Chart of the World

<https://etc.usf.edu/maps/pages/100/167/167.htm>

Choropleth maps - A standard approach to communicating aggregated data by geographical areas using color encoding of the geographic area


They require some care: what are the possible issues?

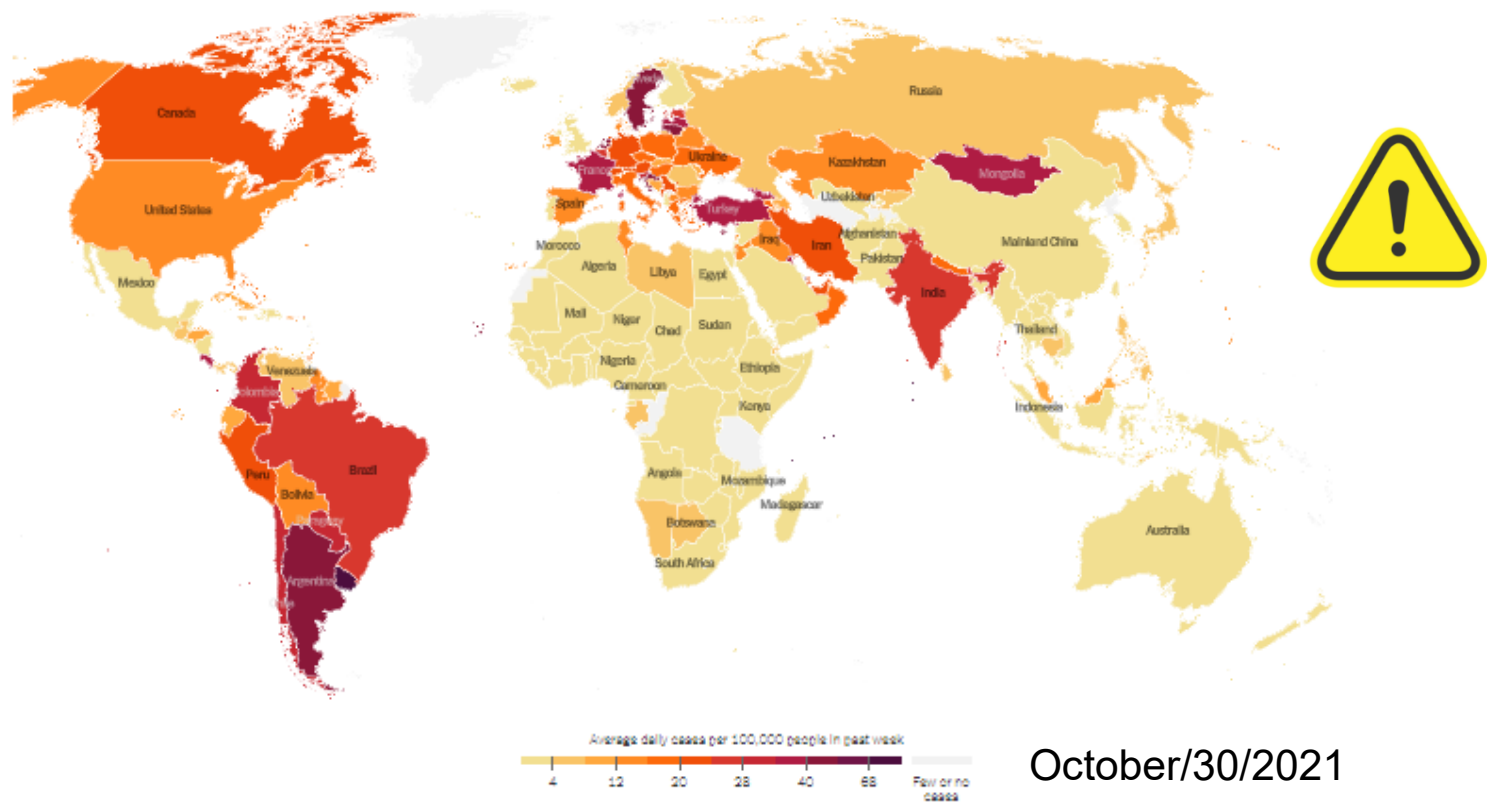

<https://www.nytimes.com/interactive/2020/world/coronavirus-maps.html>


How can these issues be mitigated?

Covid vaccination worldwide
(choropleth + details on demand)

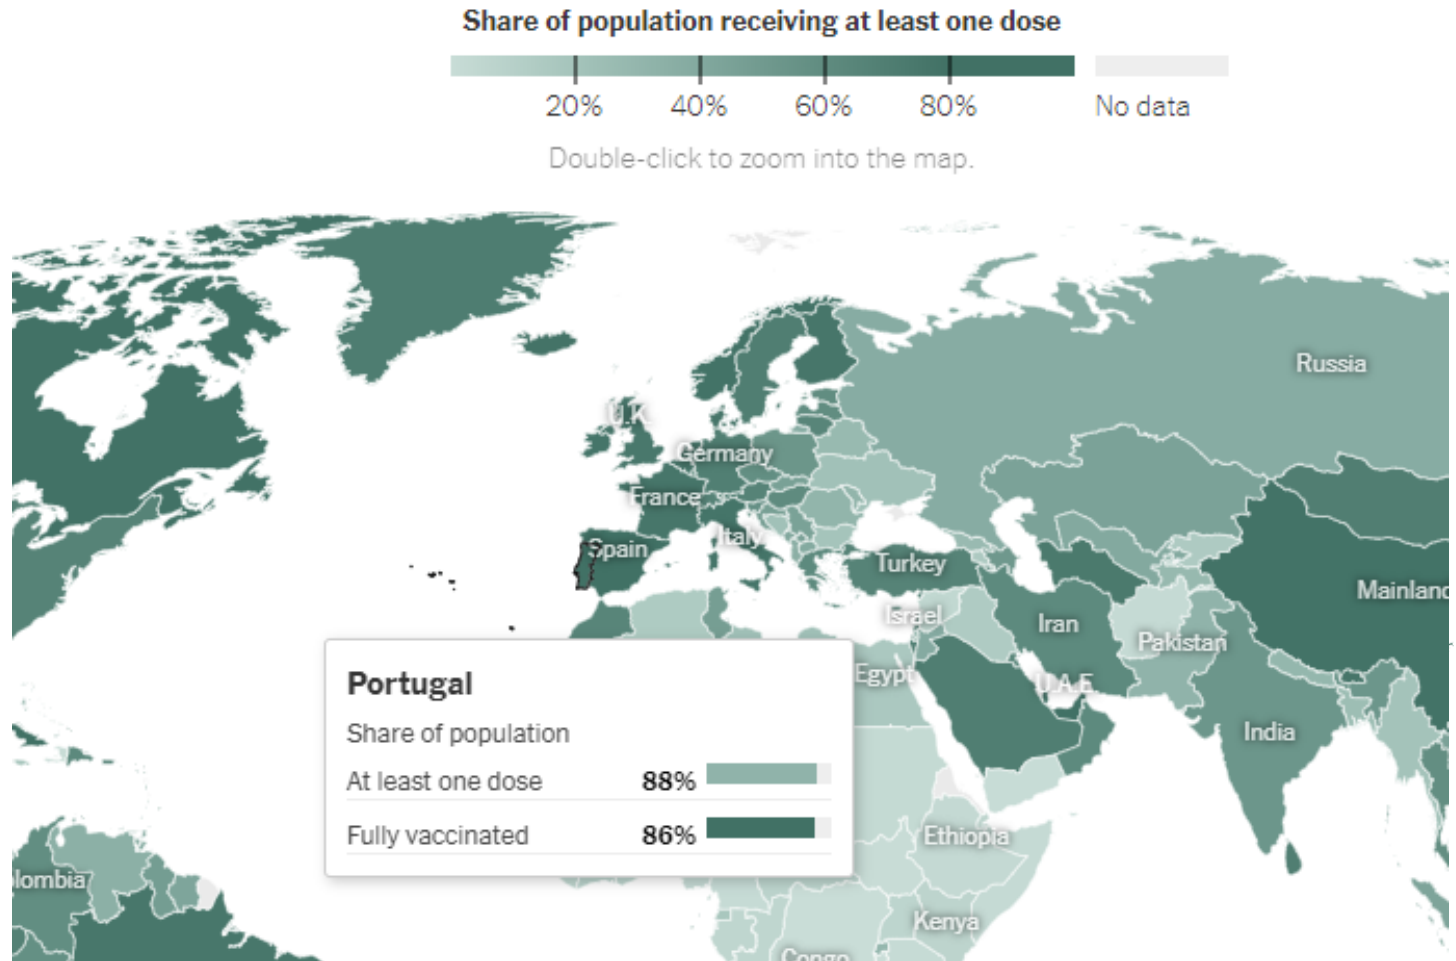


<https://www.nytimes.com/interactive/2021/world/covid-vaccinations-tracker.html>

Visualizations of the US 2020 Election (choropleth + bar)

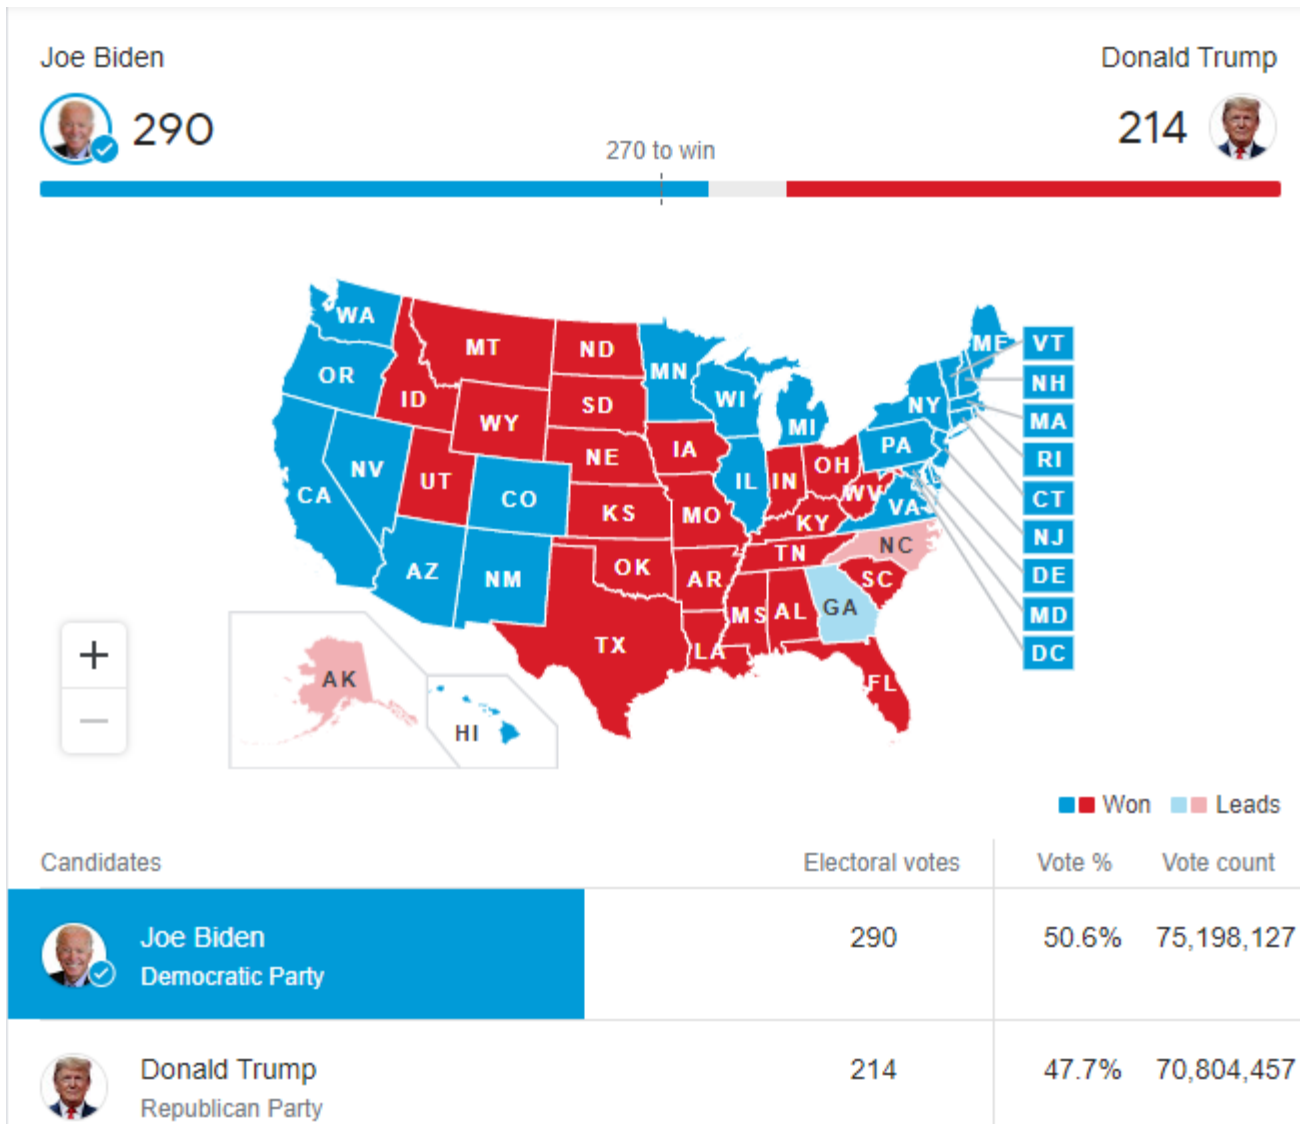

Some more examples
on how humans see...


Population of major cities in England,
Wales and Scotland. Circle area is
proportional to population. (Spence, 2007)

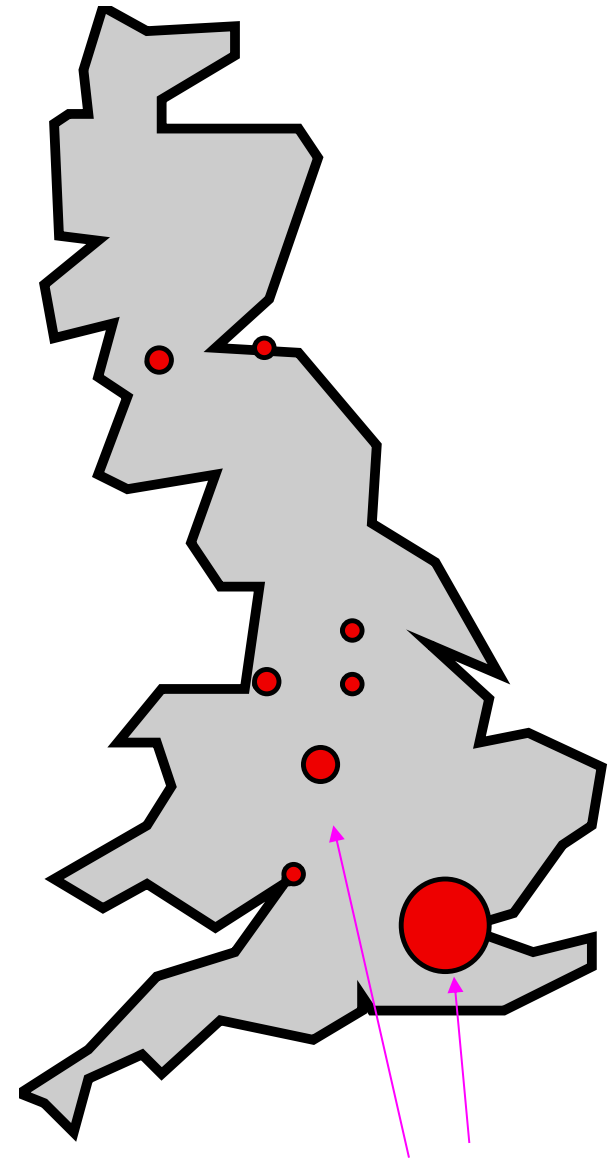


Things that “pop-out”

Pre-attentive processing: Things that “pop out”


“We can do certain things to symbols to make it much more likely that they will be visually identified even after a very brief exposure” (Ware, 2004)

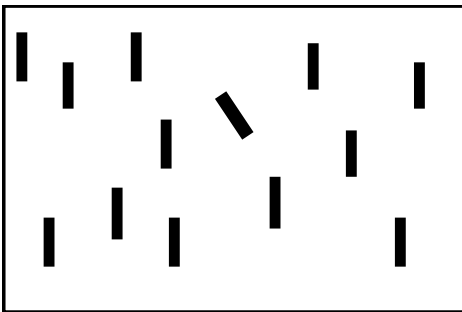

Orientation

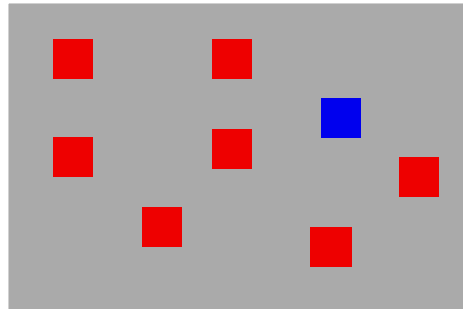


Colour

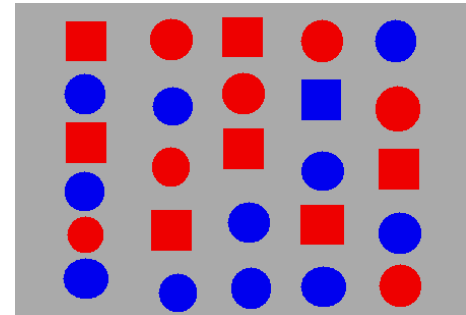


Where is the blue square?

(Spence, 2007)

But we should be careful...

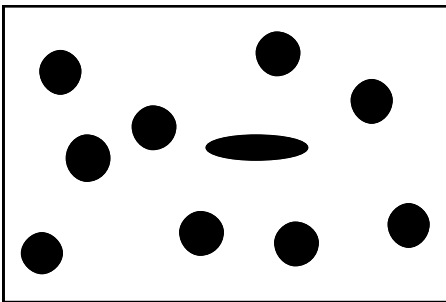

Shape

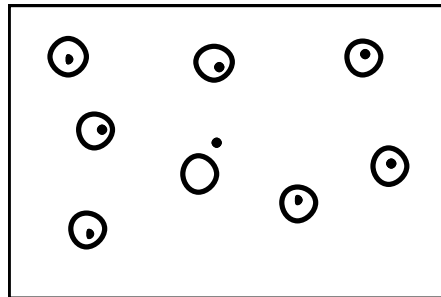

Enclosure

Color is a strong visual cue

- How many cherries?



(Ware, 2004)

Color is a strong visual cue: it may help users perform their tasks
If correctly used


How many cherries?




Color may support users in many tasks!
Or not ...

Color may not help or even make it more difficult!

A

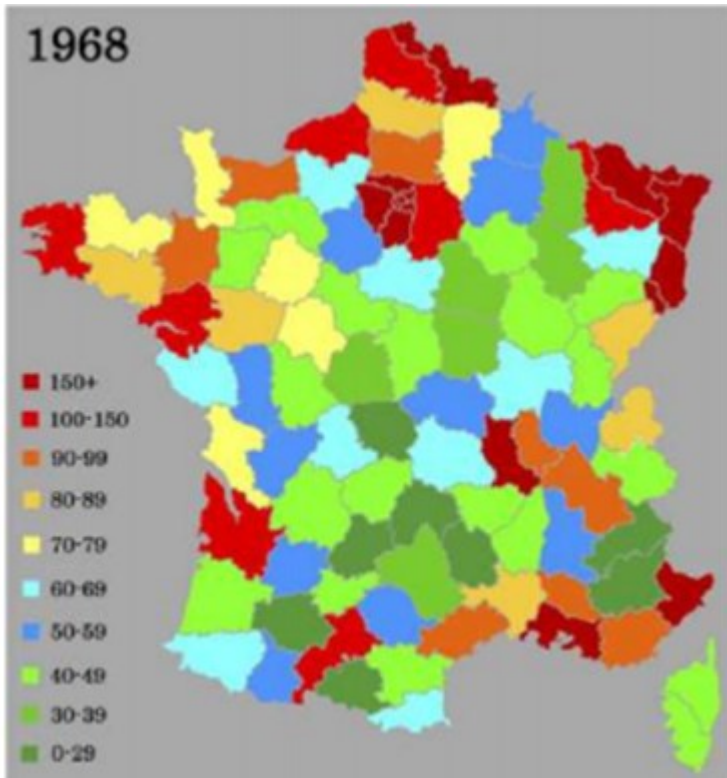

B

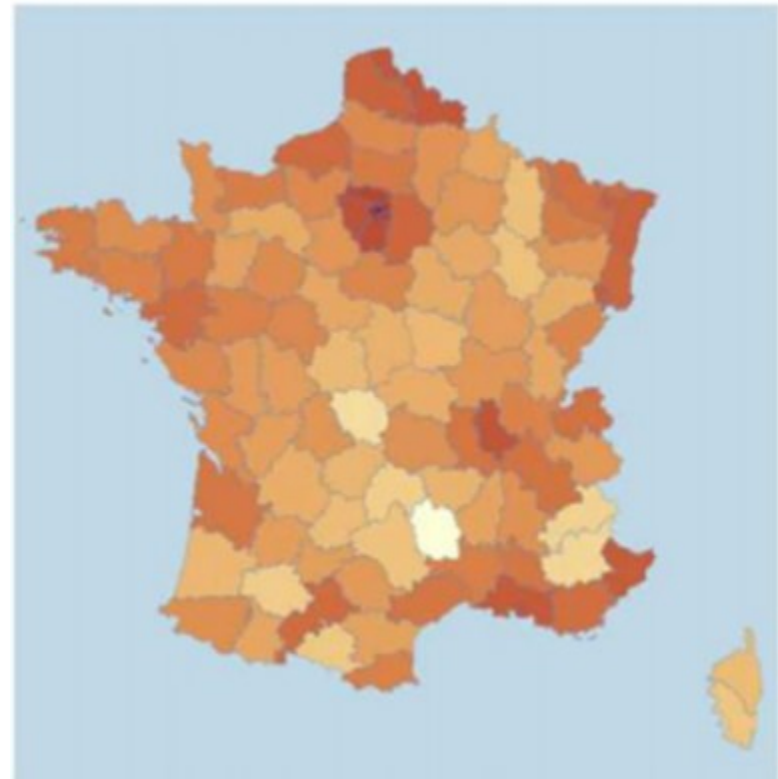


A- no preattentive association that allows efficiently determine the values (Kirk, 2012)

B- a single hue and a sequential color scheme representing values in an immediately understandable way

The misuse of colour in science communication



The superiority of scientifically derived colour maps.

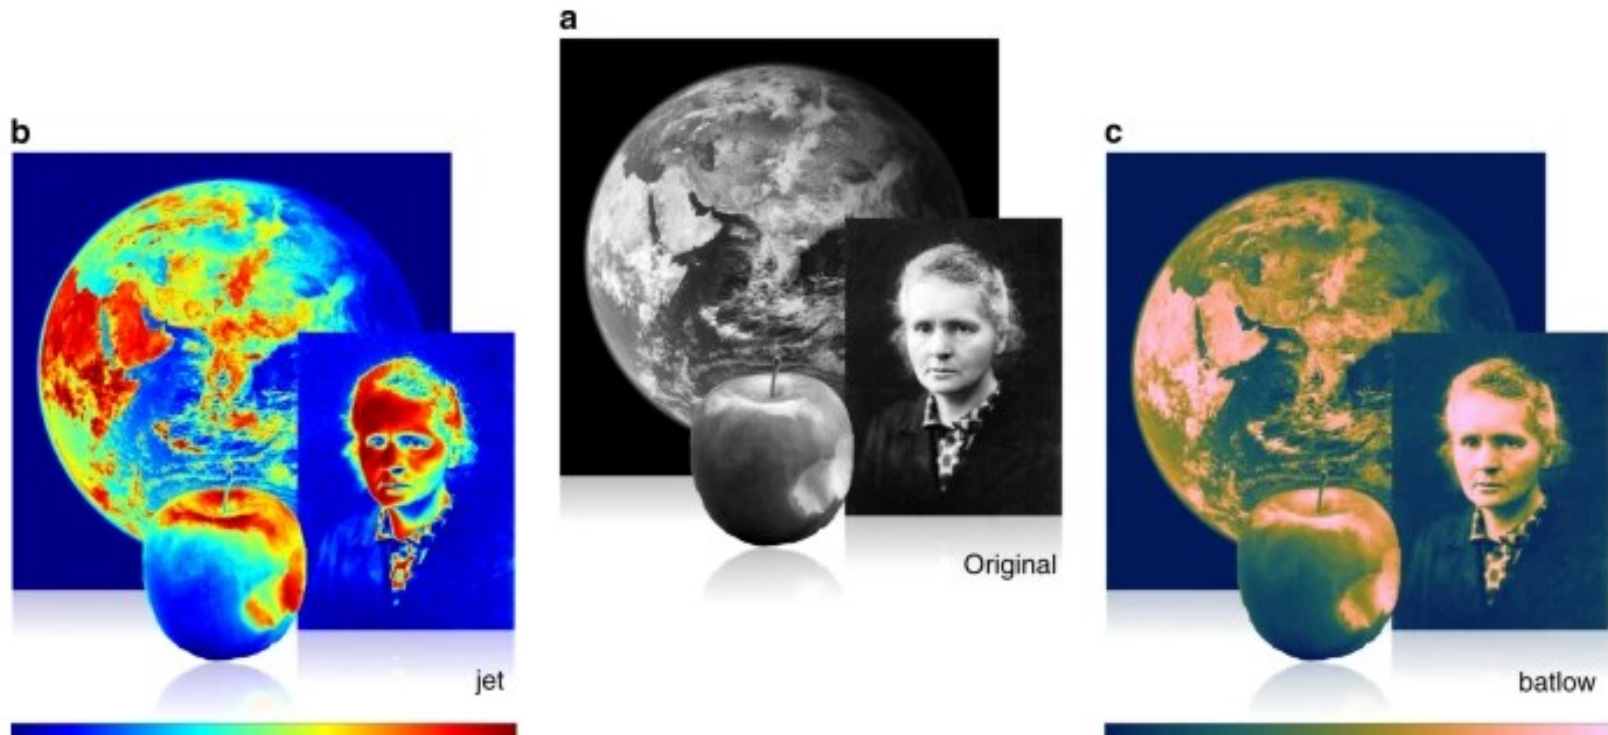

<https://www.nature.com/articles/s41467-020-19160-7>

Remember:

- Not everyone sees color:
- The most common form of color blindness is deuteranopia (“daltonism”)
- There are color blindness simulators



Normal vision



Deuteranopia



Tritanopia

Drag and drop or paste your file in the area below or: Nenhum ficheiro selecionado

Trichromatic view: Anomalous Trichromacy: Dichromatic view: Monochromatic view:

Normal Red-Weak/Protanomaly Red-Blind/Protanopia Monochromacy/Achromatopsia

Green-Weak/Deuteranomaly Green-Blind/Deuteranopia Blue Cone Monochromacy

Blue-Weak/Tritanomaly Blue-Blind/Tritanopia

Use lens to compare with normal view: No Lens Normal Lens Inverse Lens

[Reset View](#)

Zoom, move and lens functionality only with your own images available.

<http://www.color-blindness.com/coblis-color-blindness-simulator>


<http://www.colourblindawareness.org/>

Representing Hypervariate (or multivariate) data


- Many real problems are of high dimensionality
(even after reducing dimensionality...)
- The challenge of representing hypervariate data is substantial and continues to stimulate invention
- Some of the mentioned representation techniques can be scaled to represent hypervariate data (to a limited extent)

Techniques for Hypervariate (or multivariate) data Visualization


- Coordinate plots
- parallel coordinate plots

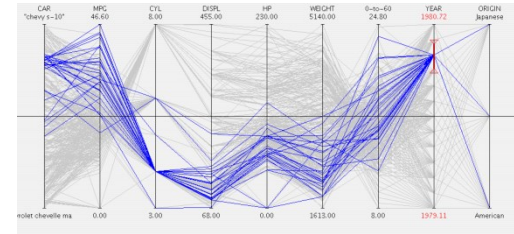


- Scatterplot Matrix

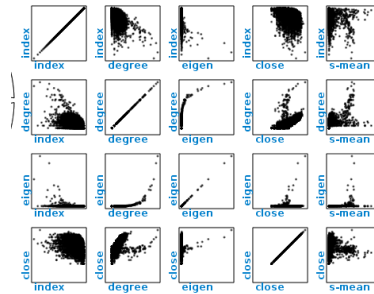


star (or radar) plots




- Maps



- Mosaic Plots



- Icons




- **Parallel coordinates plots** are one of the most popular techniques for hypervariate data


Make	Price (£)	MPG	Rating	Age (yrs)
Ford	15,450	31	*****	3
Chevy	12,450	27	***	4

- They have a very simple basis

...

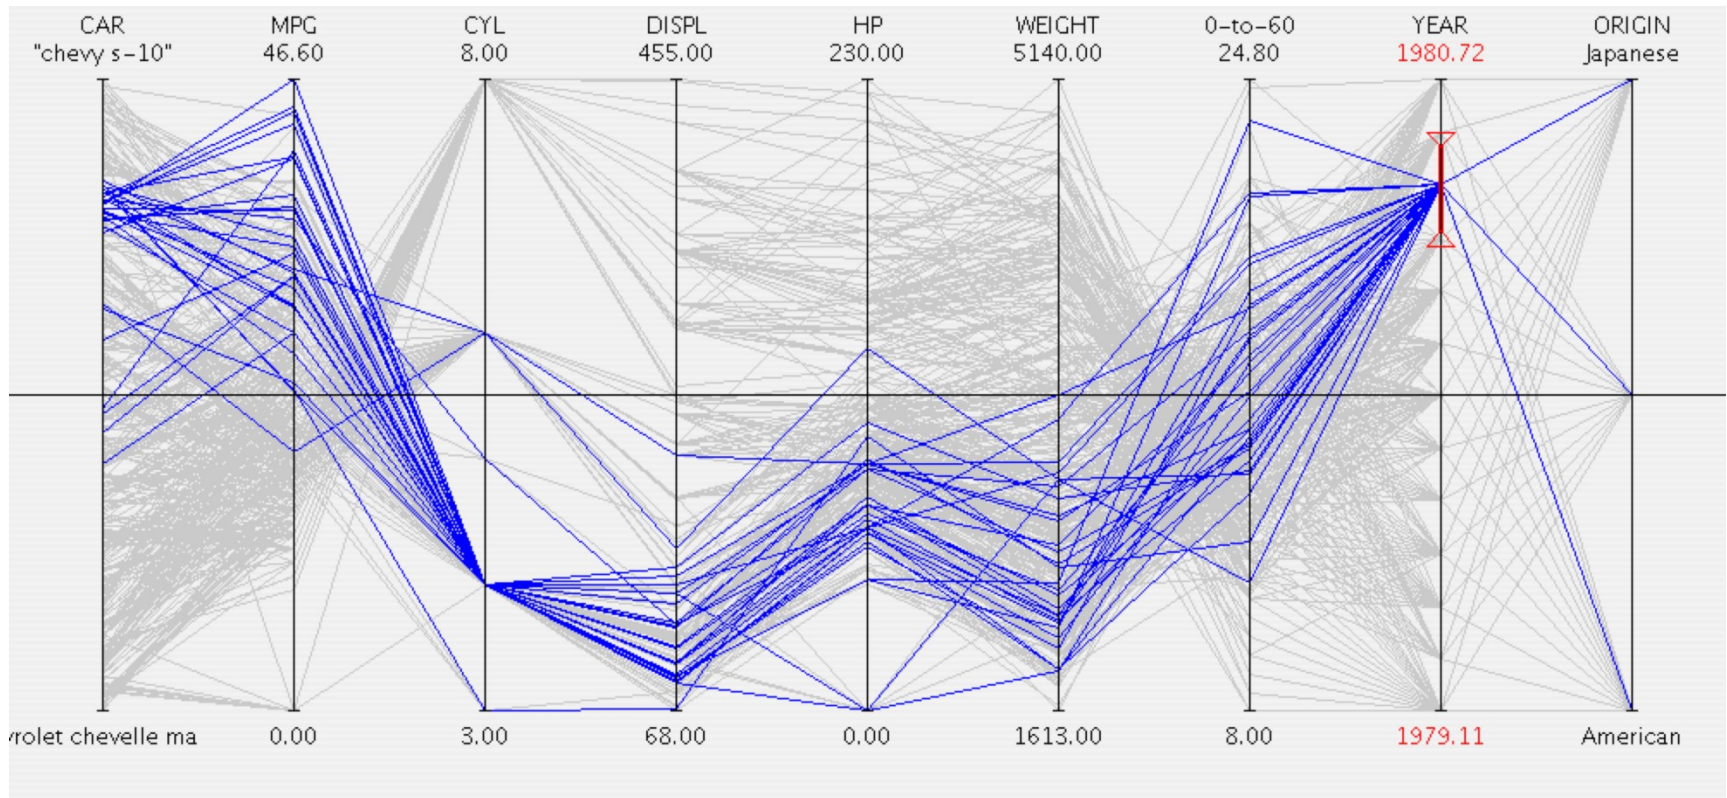


Consider a simple case of bivariate data:

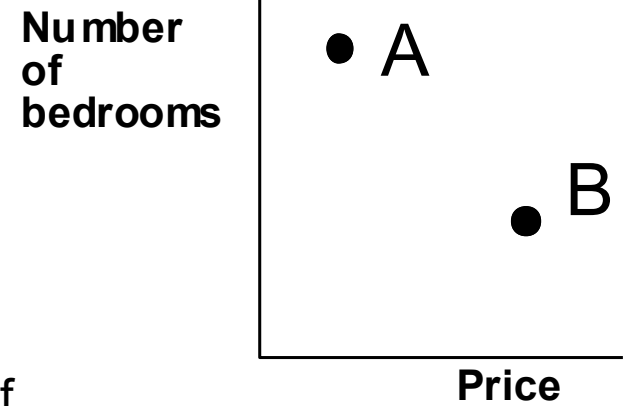


1- A scatterplot represents the price and number of bedrooms associated with two houses

2- the axes are detached and made parallel; each house is represented by a point on each axis

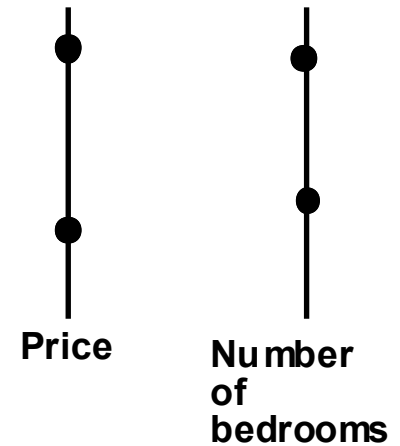


3- To avoid ambiguity the pair of points representing a house are joined and labeled

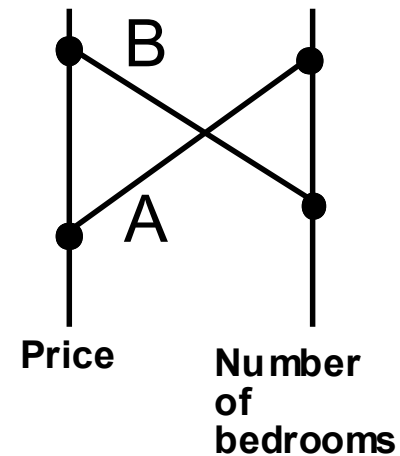


- For objects characterized by many attributes the parallel coordinate plots offer many advantages

A example for six objects, each characterized by seven attributes:

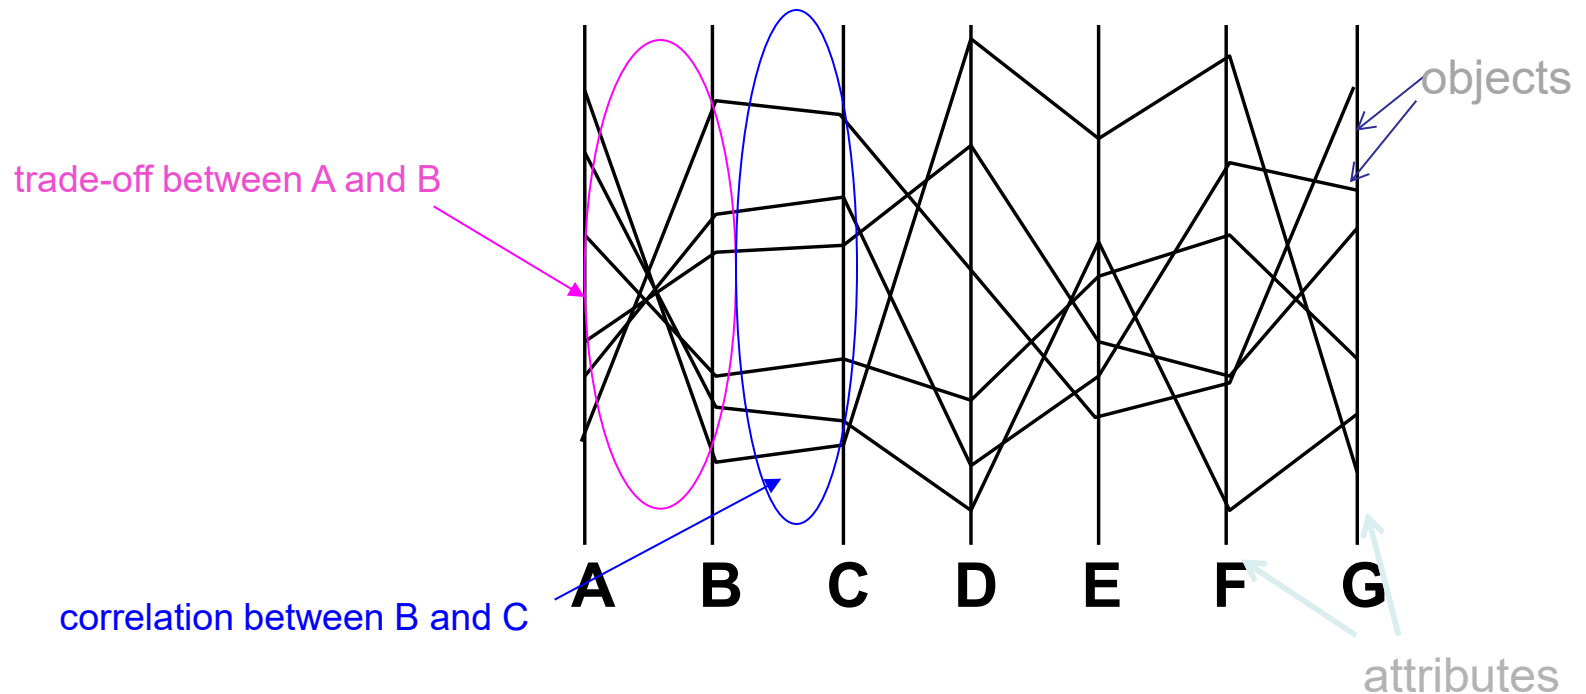


The trade-off between A and B, and the correlation between B and C, are immediately apparent. The trade-off between B and E, and the correlation between C and G, are not.

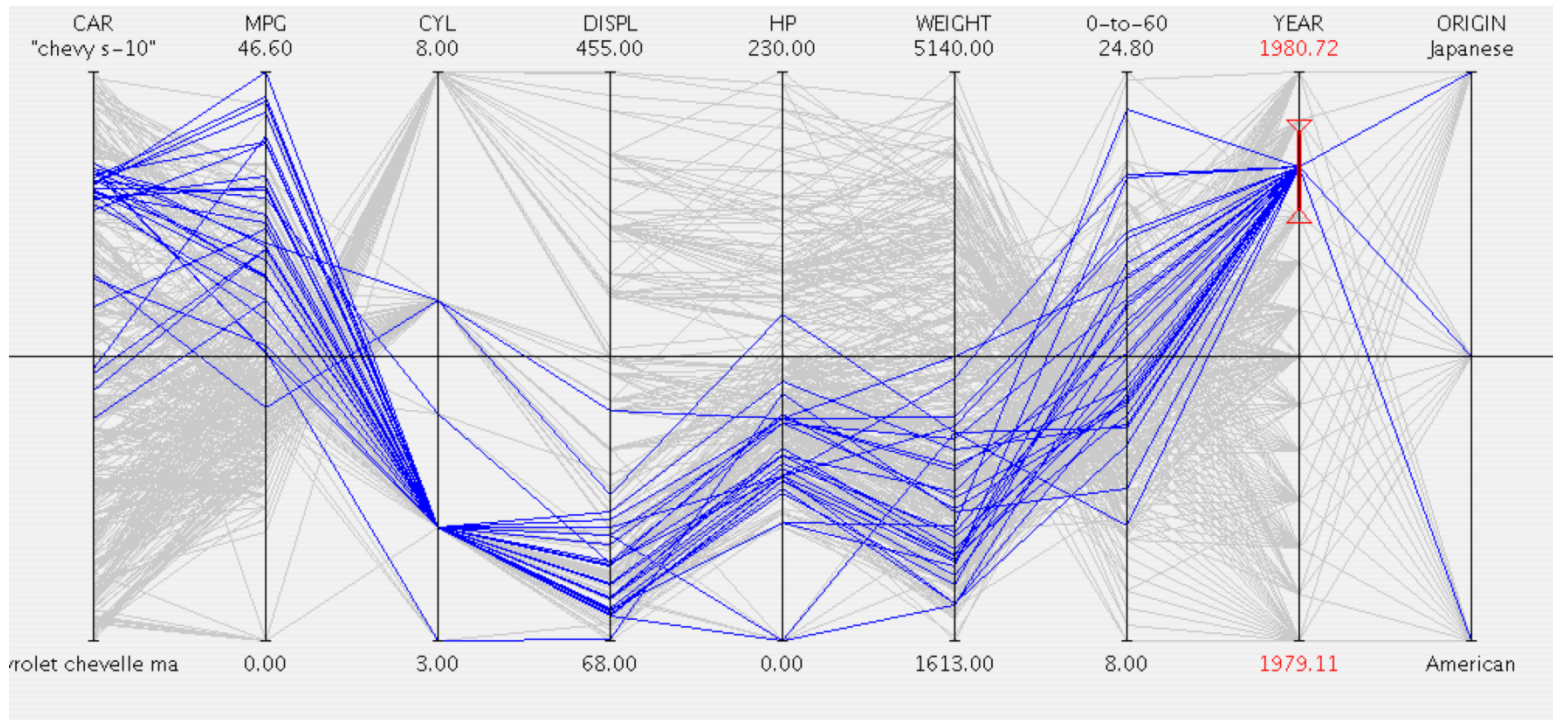

A parallel coordinate plot representation of a collection of cars, in which a range of the attribute *Year* has been selected to cause all those cars manufactured during that period to be highlighted.

Properties of parallel coordinate plots:

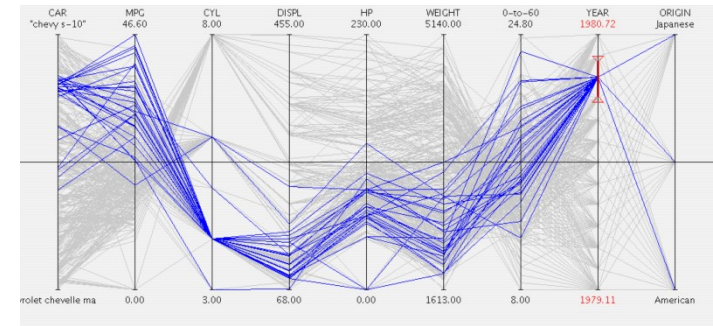

- Suitable to identify relations between attributes
- **Objects are not easily discriminable**; each object is represented by a polyline which intersects many others
- They offer **attribute visibility** (the characteristics of the separate attributes are particularly visible)
- The **complexity** of parallel coordinate plots (number of axes) is directly **proportional to the number of attributes**
- All attributes receive **uniform treatment**


- **Star plots** have many features in common with parallel coordinate plots

- An attribute value is represented by a point on a coordinate axis

- Attribute axes radiate from a common origin

- For a given object, points are joined by straight lines

- Other useful information such as average values or thresholds can be encoded

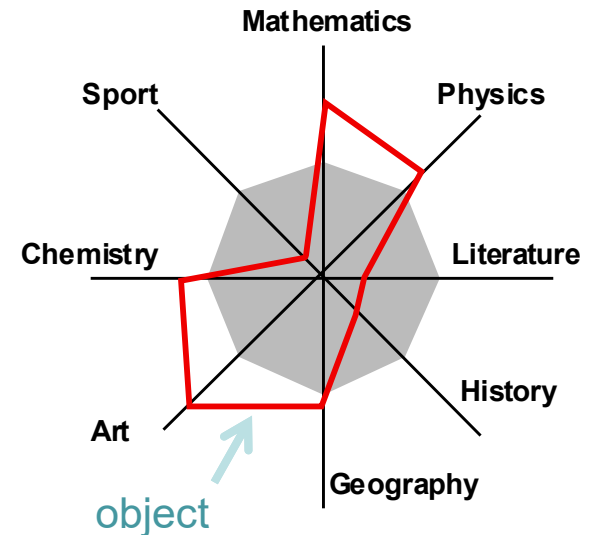


(Spence, 2007)


Properties of star plots:

- Their shape can provide a reasonably rapid appreciation of the attributes of the objects
- They offer **object visibility** and are suitable to compare objects

(by visibility it is meant the ability to gain insight pre-attentively; without a great cognitive effort)

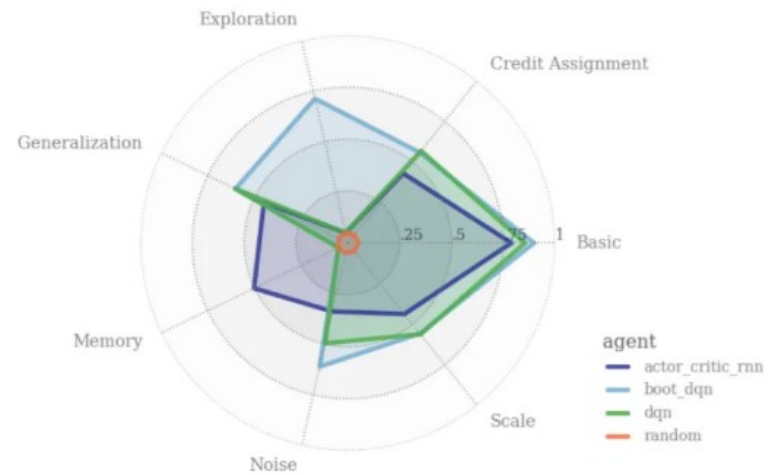

<https://syncedreview.com/2019/08/16/deepmind-bsuite-evaluates-reinforcement-learning-agents/>

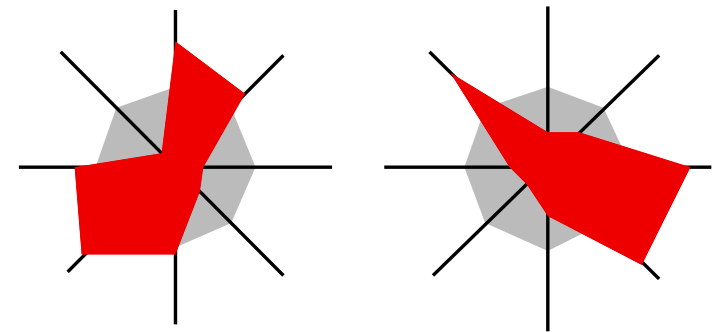


Bob's performance Tony's performance

(Spence, 2007)

- The **scatterplot matrix** (SPLOM) is applicable to higher dimensions
- However, as the number of attributes increase, the number of different pairs of attributes increases rapidly:


- 2 attributes -> 1 scatterplot
- 3 attributes -> 3 scatterplots
- 4 attributes -> 6 scatterplots

We may try to reduce the number of dimensions keeping the more relevant

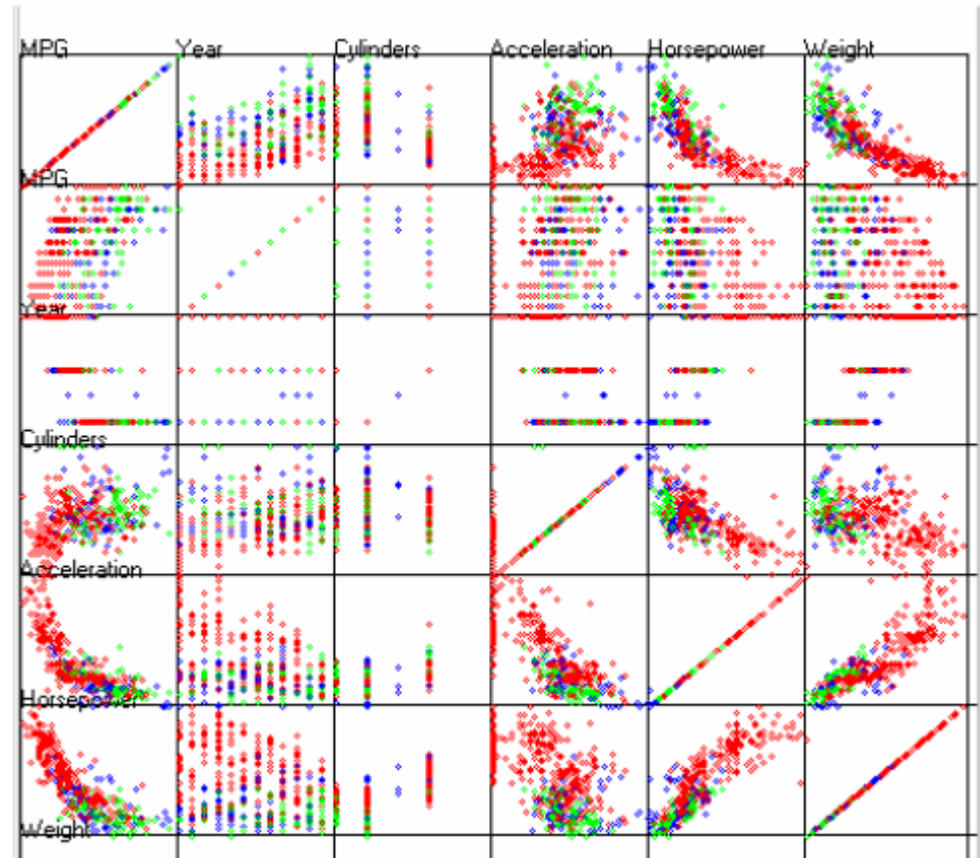


Scatterplot matrix for 6 attributes of a car dataset


- Another example of Scatterplot matrix for a car dataset

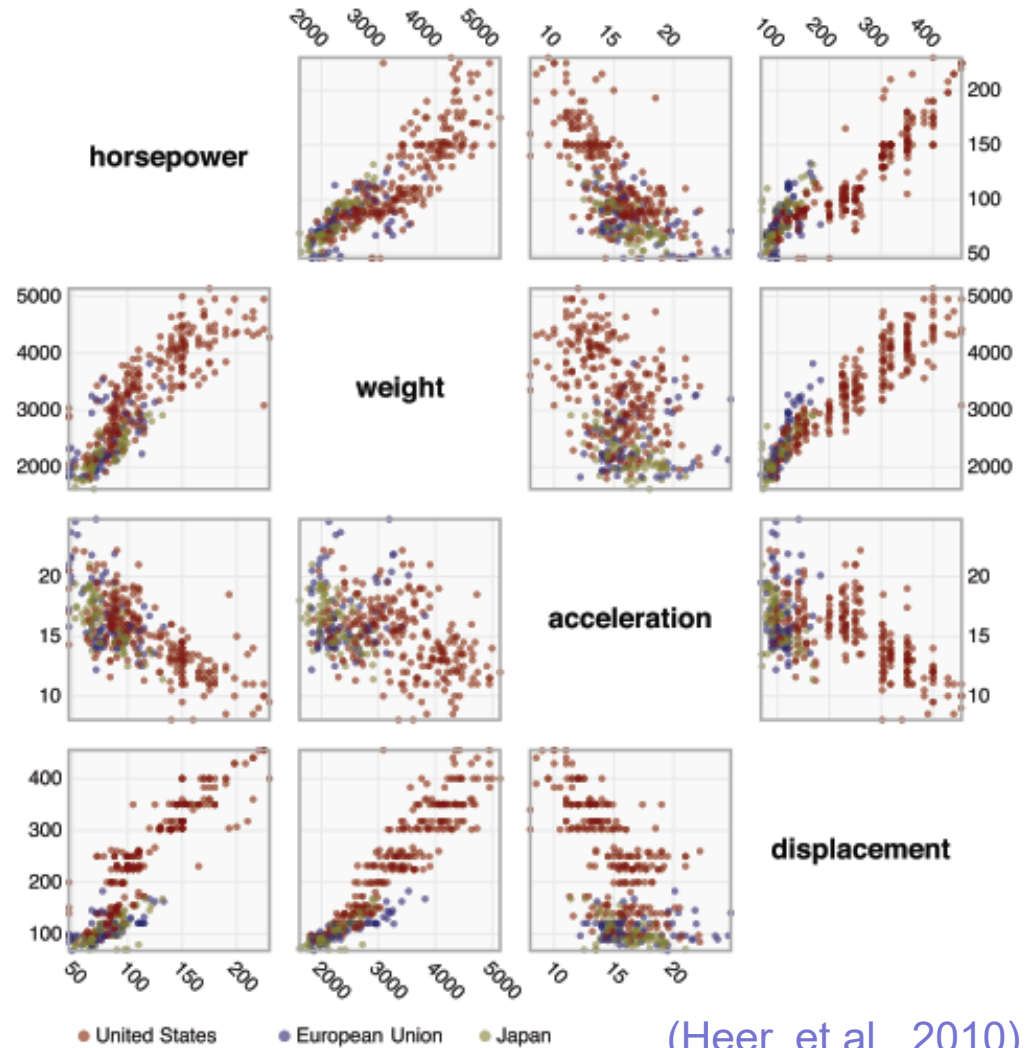

- A single scatterplot can be used together with other encoding techniques to represent data of higher dimension

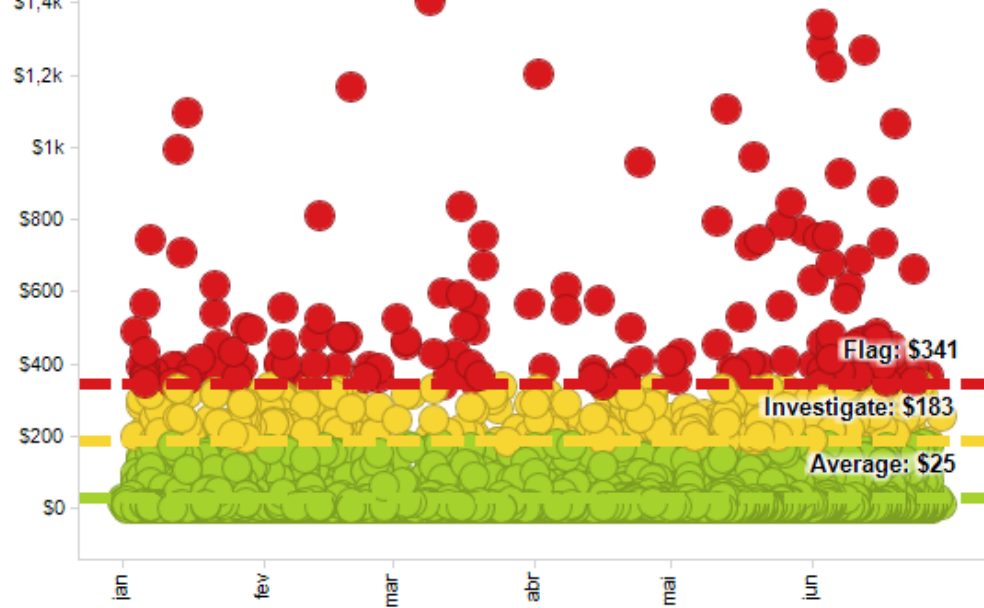

Average departure delay & standard deviation (size) by carrier

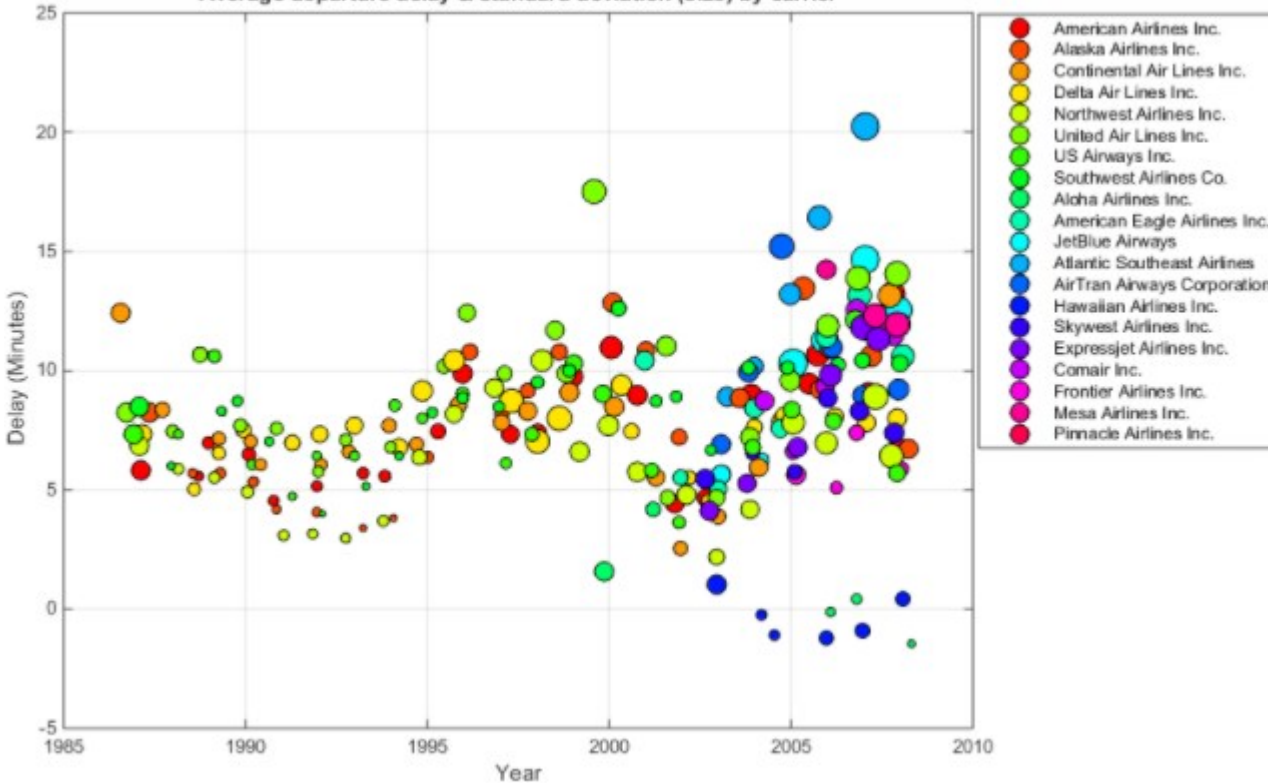

<https://spotfire.tibco.com/resources/product-demonstration-interactive/expense-analytics>

<https://www.mathworks.com/matlabcentral/fileexchange/48005-bubbleplot-multidimensional-scatter-plots>

A scatterplot representing 5 variables


Hans Rosling's 200 Countries, 200 Years, 4 Minutes: 120 000 values

Income (x), Age expectancy (y) , Time (t), Continent (colour), Population (size of circle)



<https://www.youtube.com/watch?v=jbkSRLYSojo>

- **Graduated Symbol Maps** are an alternative to the choropleth map;
- Symbols are placed over an underlying map; may show more dimensions
- Avoid confounding geographic area with data values

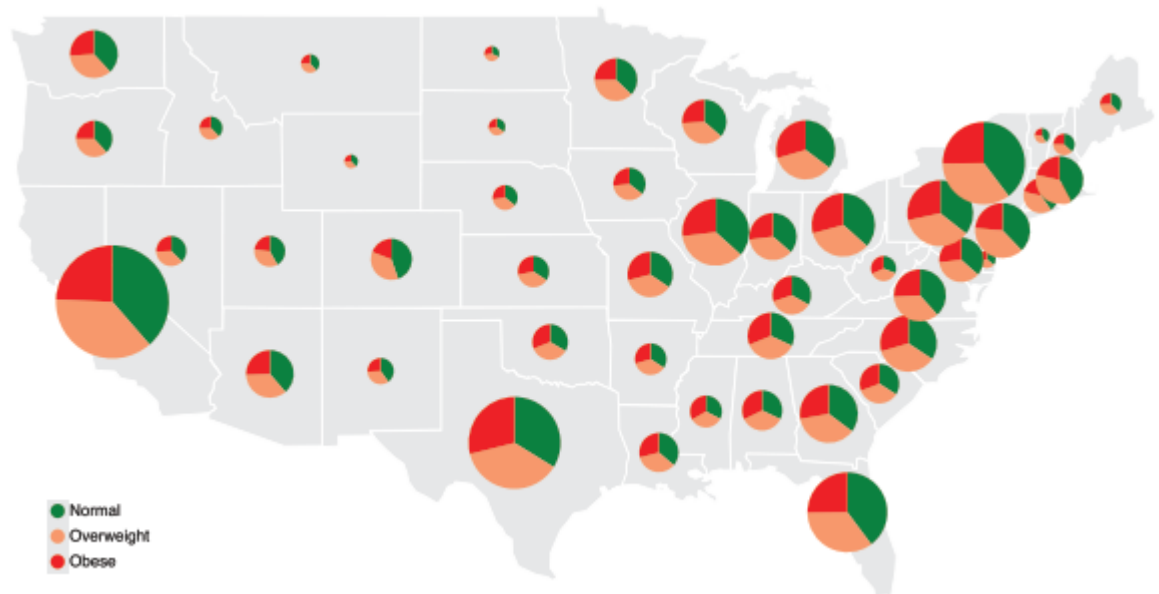


Obesity in the US (2008)
(Heer et al., 2010)

- **Cartograms** distort the shape of geographic regions so that the area directly encodes a data variable.
- There are several types
- **Dorling cartograms** represent each geographic region with a sized circle placed so as to resemble the true geographic configuration

In these example:

- area encodes the total number of obese people per state

- color encodes percentage of obese population

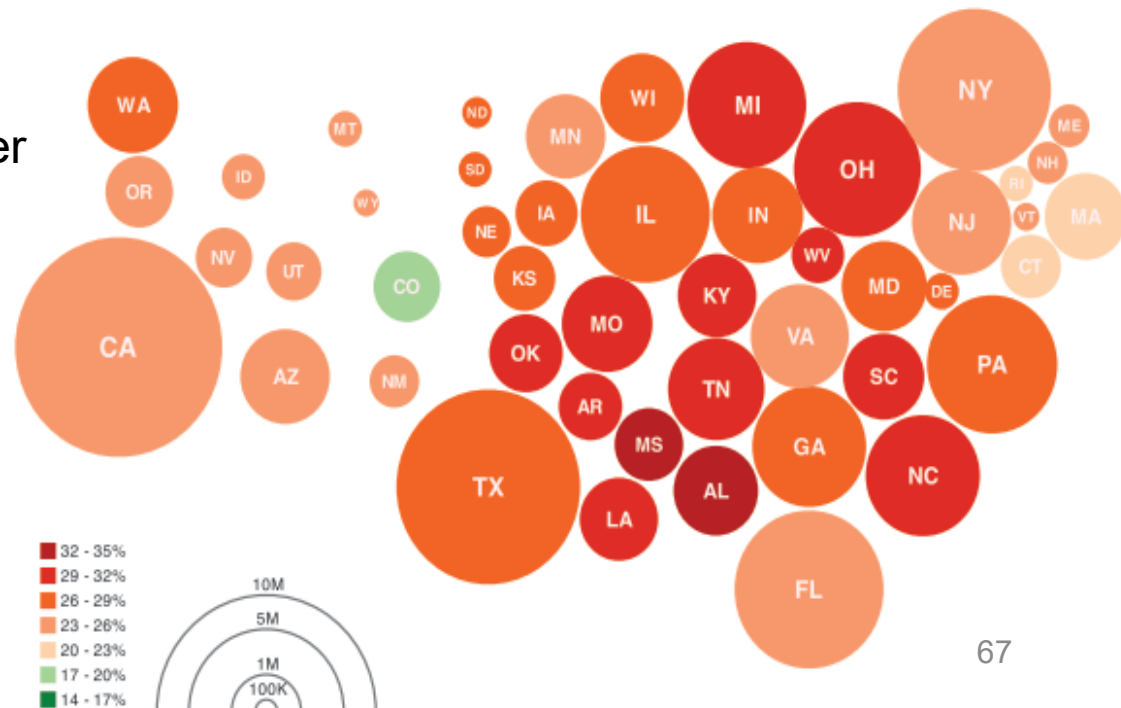

Obesity in the US (2008)
(Heer et al., 2010)

US Presidential Election 2016

Results mapped at county level showing the candidate with the largest vote share in each area

Overall result:

Trump
60,265,858 votes (47.3%)
290 electoral votes



Clinton
60,839,922 votes (47.8%)
228 electoral votes

Other candidates
6,226,950 votes (4.9%)

Vote share
of candidate with most votes

0 50 70 90%



Trump
Clinton

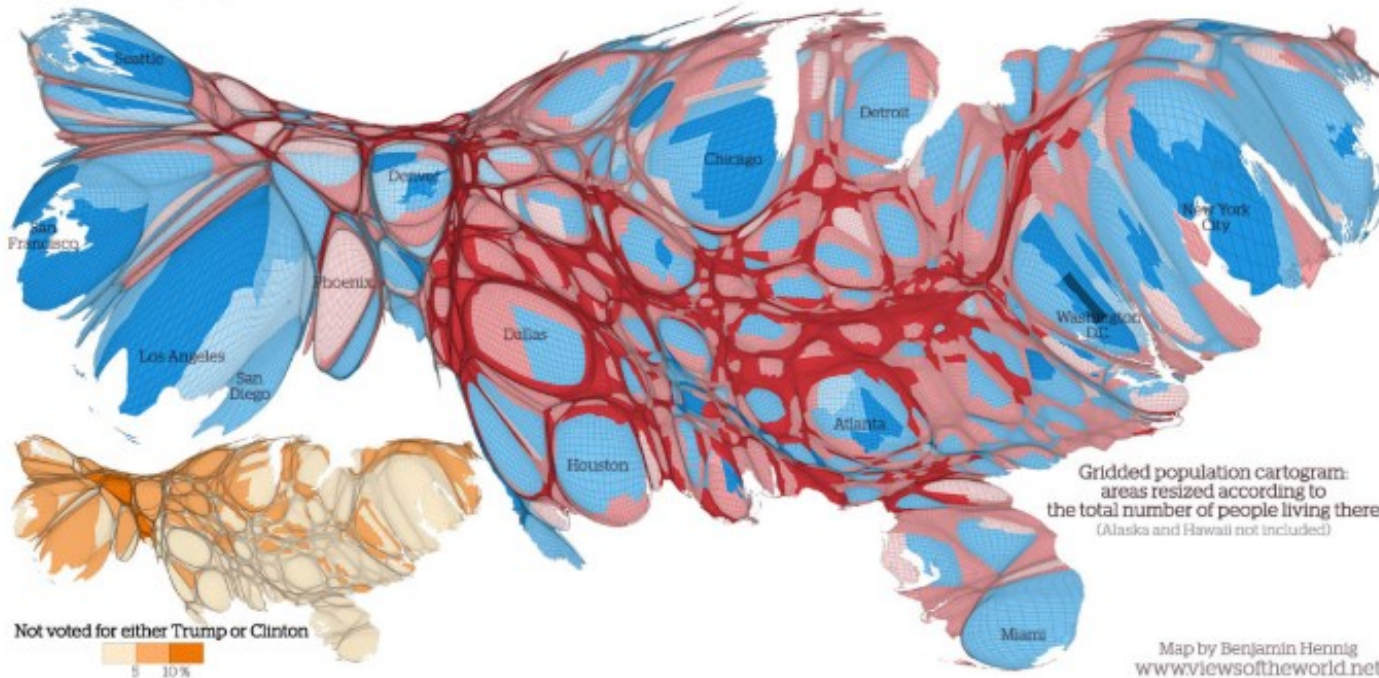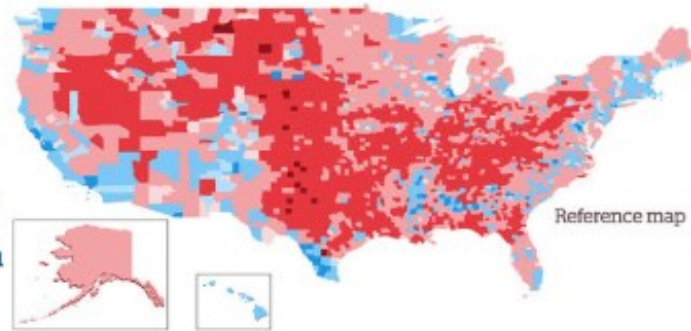

Cartogram showing the 2016 US election results (Click image for larger version)

<https://geographical.co.uk/places/mapping/item/1981-us-election-cartogram-special>

Icons (aka glyphs) represent a number of attributes qualitatively or quantitatively

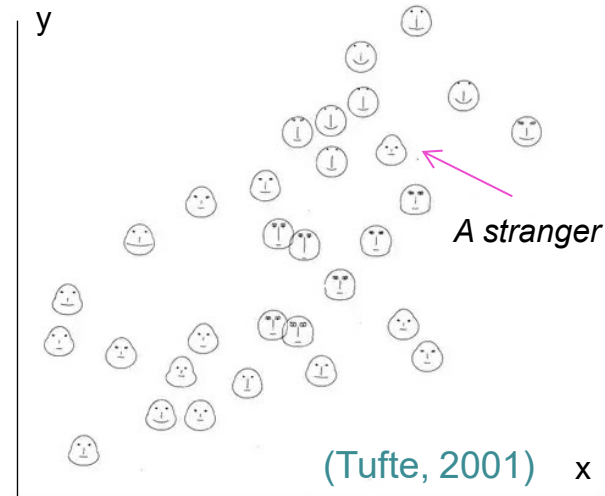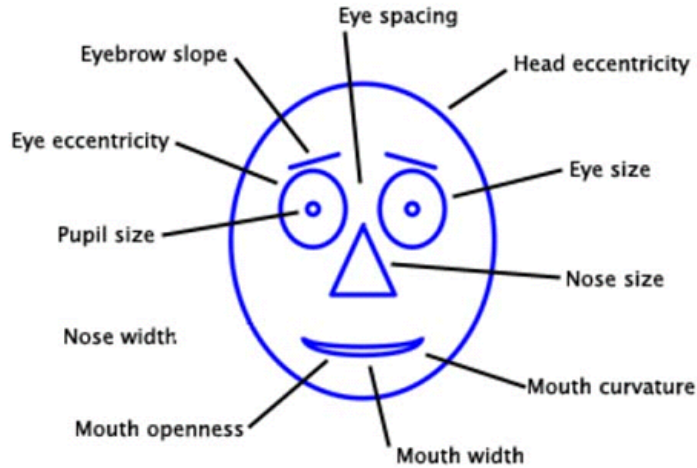


Chernoff Faces allow attribute values to be encoded in the features of cartoon faces

They were originally used to study geological samples, each characterized by 18 attributes

https://en.wikipedia.org/wiki/Chernoff_face

Multidimensional icons representing eight attributes of a dwelling

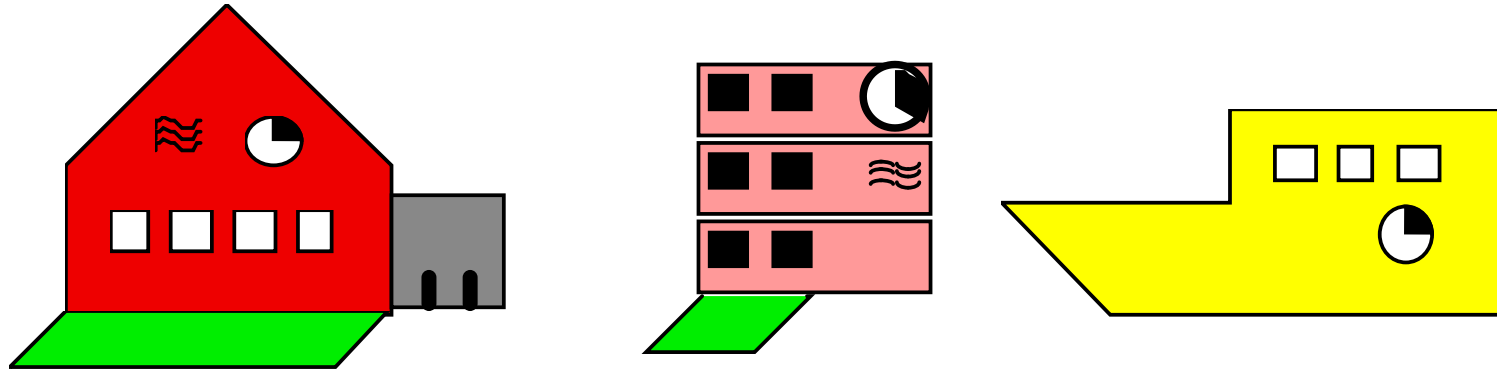

house
£400,000
garage
central heating
four bedrooms
good repair
large garden
Victoria 15 mins

flat
£300,000
no garage
central heating
two bedrooms
poor repair
small garden
Victoria 20 mins


house boat
£200,000
no garage
no central heating
three bedrooms
good repair
no garden
Victoria 15 mins

Textual descriptions of the dwellings represented by the multidimensional icons
(Spence, 2007)

Glyph chart example:

Based on a shape being the main artifact of representation

The physical properties of the shape represent different categorical variables sized according to the associated quantitative value and distinguished through color

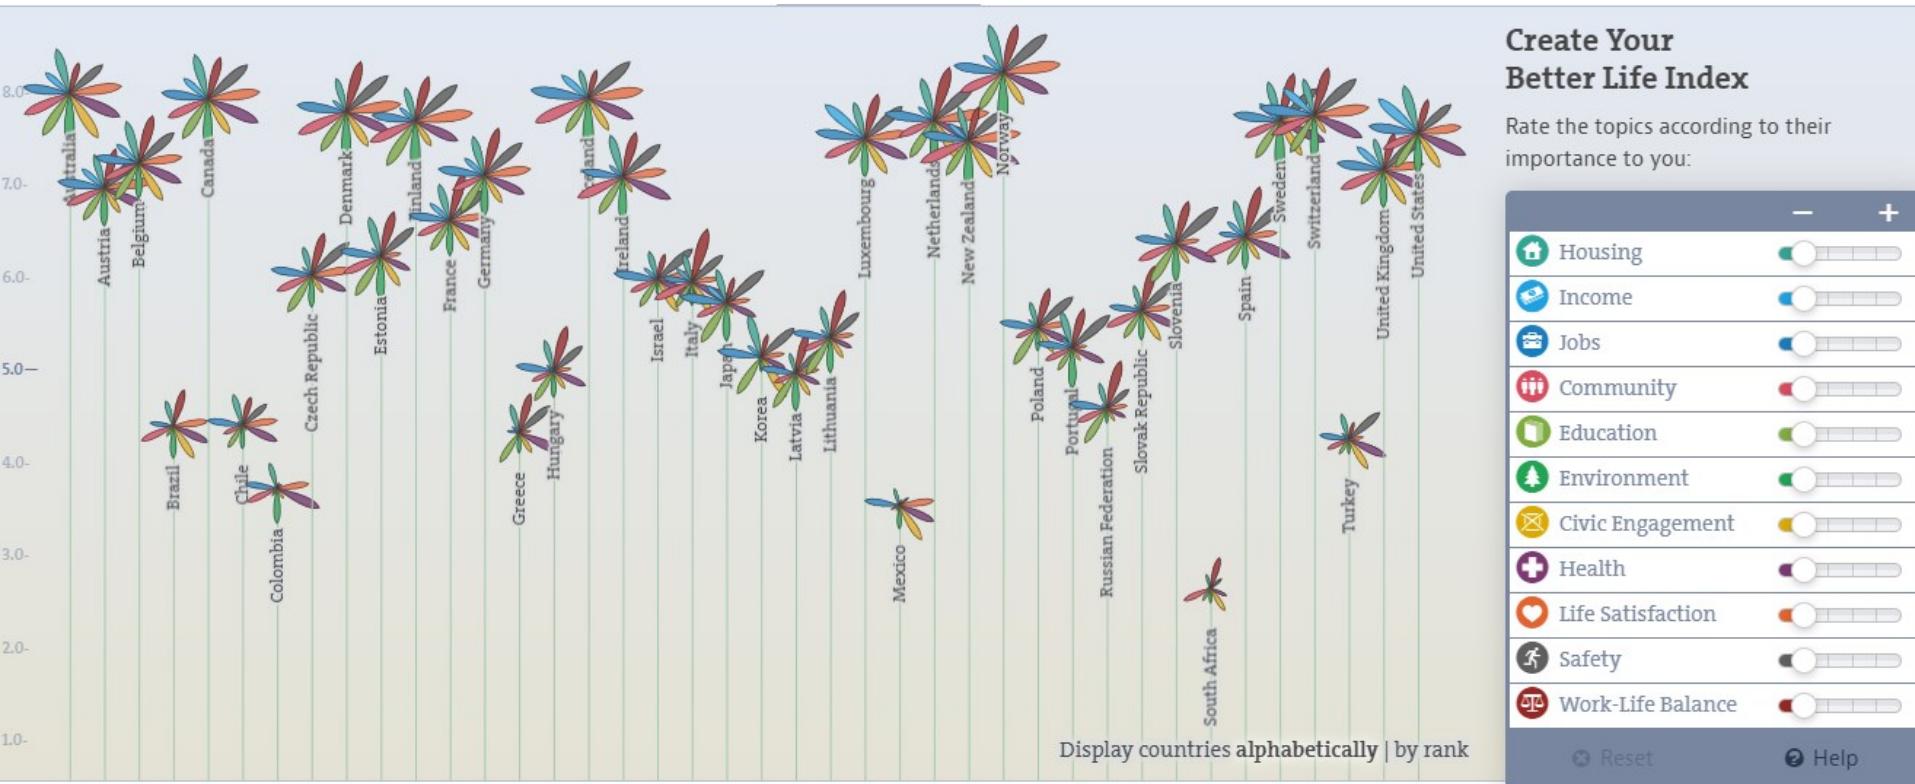

<http://oecdbetterlifeindex.org>

(Kirk, 2012)

Small multiples:

arrangement approach
that facilitates efficient
and effective
comparisons

(Kirk, 2012)



Example:

Use visualization techniques to help answer the following questions:

Is there a relation between wanted salary and experience?

How many candidates ask for a salary in [30000, 50000] and in [55000, 75000]?

How many candidates have an advanced level of English?

	Education	Age	Prof. Experience	English	Wanted salary
#	(MSc/PhD)	(years)	(years)	(Bas/Adv)	(\$\$/year)
1	MSc	22	0	Advanced	36000
2	MSc	23	0	Basic	36000
3	MSc	24	1	Advanced	36000
4	PhD	30	7	Advanced	72000
5	MSc	25	1	Basic	40000
6	PhD	29	5	Advanced	60000
7	MSc	31	7	Advanced	55000
8	MSc	23	0	Advanced	36000
9	MSc	26	2	Intermediate	40000
10	PhD	32	9	Intermediate	65000
11	BSc	30	7	Intermediate	30000
12	PhD	40	17	Advanced	80000
13	MSc	28	4	Advanced	40000

the complete table has many more candidates and attributes, but you may test with these

Bibliography

- Spence, R., *Information Visualization, Design for Interaction*, 2nd ed., Prentice Hall, 2007
- Munzner, T., *Visualization Analysis and Design*, A K Peters/CRC Press, 2014
- Kirk, A., *Data Visualization: a successful design process*, Packt Publishing, 2012
- Mazza, R., *Introduction to Information Visualization*, Springer, 2009
- Ware, C., *Information Visualization, Perception to Design*, 2nd ed., Morgan Kaufmann, 2004
- Tufte, E., *The Visual Display of Quantitative Information*, 2nd ed., Graphics Press, 2001
- Heer, J., Bostock, M., & Ogievetsky, V. A tour through the visualization zoo. *Communications of the ACM*, vol. 8, n.1, 2010
<https://doi.org/10.1145/1743546.1743567>

Acknowledgement

The author of these slides is grateful to Professor Robert Spence as he provided the electronic version of his book figures